FLOOR PLAN GENERAL NOTES

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE FA (FLOOR TO STRUCTURE ABOVE).
2. UNLESS NOTED OTHERWISE, DEMISING PARTITIONS ARE TO BE TYPE FA (FLOOR TO STRUCTURE ABOVE).
3. PARTITIONS ARE CENTERED ON BUILDING PLANNING MODULE UNLESS DIMENSIONED OR NOTED.
4. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION OR CENTERLINE OF COLUMN UNLESS NOTED OTHERWISE.
5. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
6. DOOR HARDWARE IS TO INCLUDE BUILDING STANDARD LEVER HANDLES WITH LATCHSETS UNLESS NOTED OTHERWISE. APPLIES TO CORRIDOR DOORS AND CORE SPACES ONLY.
7. REFER TO A8.00 FOR PARTITION GENERAL NOTES.
8. ALL EXISTING PARTITIONS TO BE PATCHED AND REPAIRED TO LEVEL 4 FINISH.
9. ALL THROUGH-PENETRATIONS OF EXISTING OR NEW FIRE-RESISTANCE RATED ASSEMBLIES TO BE FIRESTOPPED IN ACCORDANCE WITH IBC 714.1.
10. ALL CARE DRILL LOCATIONS MUST BE SCANNED. THESE SCANS MUST BE REVIEWED AND APPROVED BY THE STRUCTURAL ENGINEER.

FLOOR PLAN GENERAL NOTES D23217

1/4" = 1'-0"

GENERAL NOTES:
1. ALL DIMENSIONS ARE TO BE CONFIRMED ON SITE
2. PROTECT ALL MECHANICAL SERVICES ON ALL PARKING LEVELS (PIPES, DUCTS, ETC) BELOW 1200mm HEIGHT ABOVE FINISHED FLOOR WITH STEEL PROTECTION PLATES OR BOLLANDS. REFER TO EXISTING CONDITIONS.
3. CONTRACTOR SHALL ENSURE THAT FINISH GRADES SLOPE AWAY FROM BUILDING AND ADJACENT PROPERTIES
4. REFER TO ELECTRICAL DRAWING SET FOR ADDITIONAL LIGHTING NOTES
5. REFER TO MECHANICAL DRAWING SET FOR ADDITIONAL HVAC, PLUMBING AND SPRINKLER NOTES
6. ALL DETAILS TO MATCH EXISTING WHEN APPLICABLE

GENERAL WORK NOTES:
1. ELEVATOR HOISTWAY EXTENSION.
   - REFER TO STRUCTURAL.
2. UPGRADE EXISTING ELEVATOR CAB FINISHES.

GENERAL NOTES - PLANS V24043

1 : 1

GENERAL NOTES

1. ALL DIMENSIONS ARE FROM FACE OF SCHEDULED PARTITION UNLESS NOTED OTHERWISE.

2. PARTITIONS ARE CENTERED ON COLUMNS AND GRID LINES U.N.O. PARTITIONS PERPENDICULAR TO EXTERIOR CURTAINWALL ARE ALIGNED TO SIDE FACE OF MULLIONS AT OFFICES, U.N.O.

3. SEE SHEET G0.10 FOR SYMBOLS, LEGENDS AND ABBREVIATIONS.

4. EXPOSED CONDUIT OR PIPING IS NOT TO BE VISIBLE AT ANY PUBLIC INTERIOR SPACES, INCLUDING AT EXPOSED CONCRETE WALLS, U.N.O.

5. USE MOISTURE RESISTANT GYPSUM BOARD AT ALL CEILING PLENUM AREAS USED FOR EXTERIOR AIR TRANSFER (ATRIUM EXHAUST).

7. ALL INTERIOR DOOR JAMBS AT HINGE SIDE ARE 5" FROM ADJACENT WALL U.N.O.

8. WALLS THAT ARE LOCATED ON GRIDELINES ARE CENTERED ON GRIDLINES U.N.O

9. FOR ROOMS IN ENLARGED A6 SERIES, SEE A6 ENLARGED FLOOR PLANS FOR WALL DIMENSIONS. FOR EXTERIOR WALL LOCATIONS, SEE A3 ENLARGED FLOOR PLANS

10. REFER TO FOOD SERVICE (FS) DRAWINGS FOR PARTIAL WALL HEIGHTS IN KITCHEN

GENERAL NOTES - CD2 PLANS L24622

12" = 1'-0"

1. FOR FLOOR PLAN GENERAL NOTES, SEE A2.03-TI
2. REFER TO PATIENT ROOM 5 (PE) FB.8.425 FOR TYPICAL PATIENT ROOM CONSTRUCTION, DIMENSIONS, AND FINISHES. UNIQUE PATIENT ROOM CONDITIONS ARE TAGGED AND DIMENSIONED SEPARATELY.
3. REFER TO PATIENT TOILET FB.8.425.9 FOR TYPICAL PATIENT TOILET CONSTRUCTION. UNIQUE PATIENT TOILETS ARE DIMENSIONED AND ELEVATED SEPARATELY.
4. REFER TO CHARTING FB.8.400.28 FOR TYPICAL CHARTING (PORCH) CONSTRUCTION. UNIQUE CHARTING STATIONS ARE DIMENSIONED AND ELEVATED SEPARATELY.

GENERAL NOTES - FLOOR PLAN (REFERENCING - LEVEL 8) S23683

12" = 1'-0"

LEGEND:

- EXISTING TO REMAIN
- NEW
- FALL ARREST ANCHOR
- EXPANSION JOINT
- PROPERTY LINE

GENERAL NOTES

1. VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK.
2. REFER TO SHEET G0.01 FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, & DIMENSIONAL STANDARDS
3. REFER TO LIFE SAFETY LS* SERIES DRAWINGS FOR LOCATION & EXTENT OF ALL RATED ASSEMBLIES
4. REFER TO A8* SERIES FOR PARTITION SCHEDULE, DOOR SCHEDULE & DETAILS
5. PARKING LEVEL & PHASE 2 PLANS ARE ISSUED UNDER SEPARATE COVER
6. PATCH & REPAIR ALL EXISTING COLUMNS, FLOORS, WALLS, CEILINGS, WINDOW FRAMES, AND EXPOSED SURFACES. FINISH EXISTING COLUMNS TO BE FLUSH SURFACES & FREE OF DAMAGE, FINISHED WITH PAINT, COLOR TO BE SELECTED.
7. SEE ELEVATIONS FOR EXTERIOR ASSEMBLY TYPES NOT NOTED IN PLAN.
8. UON, ALL PARTITIONS ARE: FA 0 3
9. UON, FURRING ON RECTANGULAR COLUMN SURROUNDS ARE: B 0 2
10. REFER TO A5* SERIES DRAWINGS FOR STAIRS & ELEVATORS
11. WHERE PORTIONS OF PLANS ARE ENLARGED, SEE A6* SERIES DRAWINGS. PARTITIONS WITHIN ENLARGED PLANS ARE ANNOTATED WITHIN THE ENLARGED PLAN.
12. NOT USED.
13. REFER TO A3* SERIES FOR EXTERIOR ASSEMBLY AND FINISH KEY

FLOOR PLANS GENERAL NOTES D24085

1/16" = 1'-0"

GENERAL NOTES, PLANS

1. PROVIDE OSSC & ADA COMPLIANT SIGNAGE THROUGHOUT.
2. AT ALL MAIN ENTRIES PROVIDE NEW ACCESS CONTROL & SECURITY CAMERA.
3. REFER TO SHEET A8.02 FOR WINDOW SCHEDULE, EXTERIOR FLOOR, ROOF, & WALL ASSEMBLIES.
4. PATCH, REPAIR, CLEAN, & PAINT ALL EXISTING EXTERIOR DOORS, RAILINGS, & RELATED ITEMS NOT BEING REPLACED.
5. PAINT ALL DORM DOORS P7 AND FRAMES P4. PAINT ALL BACK OF HOUSE DOORS AND FRAMES (STOR., JC, ETC.) P1. PAINT ALL STAIR DOORS ON HOLD OPENS P1 AND FRAMES P4. EXCLUDE ALL BASEMENT DOORS UNLESS NOTED OTHERWISE.
6. ALL INFILL WALLS TO MATCH ADJACENT EXISTING CONSTRUCTION. MATCH RATING INDICATED ON A0.21, PROVIDE ACOUSTICAL INSULATION AT DORM DEMISING WALLS.

EXISTING / NEW WALL LEGEND

- EXISTING WALLS TO REMAIN
- NEW WALLS

GENERAL NOTES - PLANS P25841

12" = 1'-0"

1. REFER TO 0-I-A11 FOR DIMENSIONING STANDARDS.
2. REFER TO CODE SUMMARY SHEETS FOR LOCATION & EXTENT OF ALL FIRE RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS & OTHER LIFE SAFETY REQUIREMENTS.
3. REFER TO 0-I-M01 FOR PARTITION INFORMATION.
4. PROVIDE BACKING TO SUPPORT HANDRAILS & MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS. REFER TO 0-I-M10 FOR BACKING INFORMATION.
5. PROVIDE GYPSUM WALL BOARD ON INTERIOR FACE OF EXTERIOR WALL.
6. UNLESS NOTED OTHERWISE, ALL WALLS TO BE:
   GA
   A 3
7. REFER GENERAL SET SHEET TO 0-I-M13 FOR SEMI-RECESSED FIRE EXTINGUISHER CABINET MOUNTING DETAILS.

GENERAL NOTES - PLANS S24177

12" = 1'-0"

GENERAL PLAN NOTES

1. REFER TO SHEET A0.00 FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, AND DIMENSIONAL STANDARDS
2. REFER TO LIFE SAFETY DRAWINGS FOR LOCATION AND EXTENT OF ALL RATED ASSEMBLIES. IN CASE OF DISCREPANCIES WITH PARTITION DESIGNATIONS/FIRE RATINGS, LIFE SAFETY DRAWINGS ALWAYS PREVAIL.
3. REFER TO A8 SERIES FOR DOOR SCHEDULE AND DETAILS.
4. REFER TO SHEET A8 SERIES FOR PARTITION TYPES.
   A. ALL PARTITIONS DESIGNATIONS TO BE **FA** UNO
   B. ALL PARTITIONS TO HAVE **3 5/8"** STUDS UNO
   C. ALL PARTITION HEIGHT DESIGNATIONS TO BE **0** UNO
5. SEE STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR SYSTEMS COORDINATION AND ADDITIONAL OPENINGS IN WALLS AND FLOORS.
6. REFER TO FINISH PLANS AND INTERIOR ELEVATIONS FOR EXTENT OF FINISHES.
7. DIMENSIONS TAKEN FROM GRID CENTERLINE AND TO FACE OF FINISH UNLESS NOTED OTHERWISE.
8. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, MONITORS, SEALS/LOGOS AND OTHER WALL SUPPORTED ITEMS.
9. ALL DOOR JAMBS ARE LOCATED (4)" FROM ADJACENT WALL UNLESS OTHERWISE NOTED.
10. REFER TO A8 SERIES FOR HEADER AND JAMB DETAIL AT INTERIOR WALL OPENINGS.
11. REFER TO A11 SERIES FOR EQUIPMENT SCHEDULES AND EQUIPMENT PLANS

GENERAL NOTES - PLANS D25278

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE **(FLOOR TO STRUCTURE ABOVE)**.

2. UNLESS NOTED OTHERWISE, DEMISING PARTITIONS ARE TO BE TYPE **(FLOOR TO STRUCTURE ABOVE)**.

3. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

4. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.

5. DOOR HARDWARE IS TO INCLUDE BUILDING STANDARD LEVER HANDLES WITH LATCHSETS UNLESS NOTED OTHERWISE.

6. EXISTING EXTERIOR WINDOW COVERINGS REMAIN. REMOVE PRIOR TO CONSTRUCTION, CLEAN, AND REINSTALL. MODIFY EXISTING WINDOW COVERINGS OR PROVIDE NEW BUILDING STANDARD EXTERIOR WINDOW COVERINGS AT NEW ROOM CONFIGURATIONS.

7. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - FLOOR PLAN S25724

12" = 1'-0"

GENERAL NOTES - FLOOR PLANS

1. EXISTING CONSTRUCTION SHOWN HALFTONE.
2. TYPICAL WALLS TYPE FA| 0 | 4 UNO.
3. 1HR PARTITION TYPE F | 1 | 4 UNO.
4. SEE LS SERIES SHEETS FOR WALL RATING LOCATION DIAGRAM IN ADDITION TO THESE DRAWINGS.
5. SEE A5.00 SERIES FOR WALL TYPES AT ELEVATORS AND STAIRS
6. SEE PARTITION DETAILS A8.01 FOR PARTITION TYPES
7. DIMENSIONS TO FINISH FACE, UNO
8. AT EXTERIOR WALLS SEE ENLARGED DETAILS FOR DIMENSION POINTS
9. SEE A3 SERIES ELEVATIONS FOR EXTERIOR WALL ASSEMBLY
10. FOR TYPICAL ROOF ASSEMBLIES, SEE 1/A4.10
11. NOTE TYPICAL WALL BASE DETAIL 13/A8.02 FOR WALL BASE AT ALL ELEVATOR LOBBIES FOR PREVENTION OF WATER INFILTRATION.
12. SEE SHEET A8.20 FOR TYPICAL MOUNTING HEIGHTS OF PLUMBING, CONTROLS AND ACCESSORIES
13. EVERY ROOM OR SPACE THAT IS AN ASSEMBLY OCCUPANCY SHALL HAVE THE OCCUPANT LOAD OF THE ROOM OR SPACE POSTED IN A CONSPICUOUS PLACE.
14. ROOMS CONTAINING FIRE PROTECTION EQUIPMENT (AIR-CONDITIONING SYSTEMS, FIRE SPRINKLER RISERS (RISER ROOM) AND VALVES OR OTHER FIRE DETECTION (FACP), SUPPRESSION OR CONTROL ELEMENTS (FCC)) AND ELECTRICAL, MECHANICAL AND ELEVATOR MACHINE ROOMS SHALL BE IDENTIFIED IN AN APPROVED MANNER. REQUIRED SIGNS SHALL BE CONSTRUCTED OF DURABLE MATERIALS, PERMANENTLY INSTALLED AND READILY VISIBLE.
15. STAIRWAYS SHALL BE MARKED AT STREET AND FLOOR LEVELS WITH A SIGN INDICATING THAT THE STAIRWAY CONTINUES TO THE ROOF IN ACCORDANCE WITH PORTLAND FIRE CODE 1022.0

GENERAL NOTES - PLANS P24169

12" = 1'-0"

1. SEE SHEET A002 FOR DIMENSIONING STANDARDS AND ADDITIONAL GENERAL NOTES.
2. UNO IN PLAN, CENTERLINE OF PARTITIONS ARE TO CENTERLINE TO GRIDLINES OR WINDOW MULLIONS.
3. UNO IN PLAN, DOOR LOCATIONS ARE PER SHEET A602.
4. EXTERIOR ASSEMBLIES PER SHEETS A501.
5. SEE A601 FOR PARTITION SCHEDULE.
6. SEE LIFE SAFETY DRAWINGS FOR LOCATION AND EXTENT OF ALL FIRE-RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS AND OTHER LIFE SAFETY REQUIREMENTS.
7. SEE ENLARGED PLANS FOR ADDITIONAL INFORMATION.
8. SEE SHEETS A521 AND A522 FOR TYPICAL INTERIOR PARTITION DETAILS AND BACKING PLATE INFORMATION.
9. PROVIDE WALL BACKING TO SUPPORT HANDRAILS AND MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS.
10. SEE A3 AND A4 SERIES FOR ADDITIONAL PLAN DIMENSIONS.
11. UNO, SEE A402 FOR TYPICAL MOUNTING HEIGHTS.
12. SEE A531 FOR TYPICAL CASEWORK DETAILS.
13. SEE A530 FOR TYPICAL FLOORING TRANSITION DETAILS.
14. SEE A523 FOR GENERAL WALL FINISH DETAILS.
15. SEE A7 SERIES FOR FINISH PLANS.
16. SEE A1 SLAB EDGE PLANS FOR CURBS, FLOOR DRAIN AND SINK LOCATIONS.
17. PROVIDE FIRE-TREATED PLYWOOD AT TELECOM, AND ELECTRICAL ROOMS.
18. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS AND SLABS.
19. CODE REQUIRED SIGNAGE TO BE PROVIDED FOR EVERY ROOM OR SPACE THAT IS AN ASSEMBLY OCCUPANCY SHOWING THE OCCUPANT LOAD OF THE ROOM OR SPACE POSTED IN A CONSPICUOUS PLACE PER IBC-1004.3

GENERAL NOTES - PLANS S24586

12" = 1'-0"

1. REFER TO SHEET A8.00 FOR PARTITION TYPES.

2. REFER TO STRUCTURAL SHEETS FOR STRUCTURAL WALL LOCATIONS

3. REFER TO A0.XX SHEETS FOR PARTION RATINGS

4. DIMENSIONS ARE TO FACE OF STUD OR FACE OF MASONRY/CONCRETE UNLESS OTHERWISE NOTED. SEE A4.XX SHEETS FOR OPENING DETAILS.

5. F.E.C. = FIRE EXTINGUISHER CABINET, 75' MAX DISTANCE BETWEEN F.E.C.'S

6. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.

7. FOR TYPICAL DIMENSIONS SEE ENLARGED FLOOR PLANS.

8. SEE SHEET A8.01 FOR FIRE RATED DETAILS AT FLOORS, CEILINGS, ROOFS, AND PARTITIONS.

9. REFER TO ENLARGED PLANS FOR WALL TYPES AT TYPICAL LOCATIONS.

10. EQUIPMENT IS SHOWN FOR REFERENCE ONLY. REFER TO FURNITURE AND EQUIPMENT PLANS.

11. FOR LEVEL 3 DIMENSIONS, REFERENCE DIMENSIONS SHOWN ON LEVEL 2, UNLESS OTHERWISE NOTED.

12. PARTITION TYPE IS A 0 4 UNLESS OTHERWISE NOTED.

GENERAL NOTES - PLANS P26251

12" = 1'-0"

GENERAL NOTES

1. REFER TO LIFE SAFETY G SERIES SHEETS FOR LOCATION AND EXTENTS OF ALL FIRE RATED ASSEMBLIES

2. PLAN DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY, CENTERLINE OF COLUMN, UNLESS OTHERWISE NOTED

3. REFER TO THE A8 SERIES FOR PARTITION TYPES AND DOOR SCHEDULE

4. ALL SWING DOORS TO BE 4" FROM FACE OF PERPENDICULAR SCHEDULED PARTITION TO INSIDE OF FRAME

5. REFER TO G SERIES FOR TYPICAL MOUNTING HEIGHTS OF EQUIPMENT AND ACCESORIES

6. PROVIDE 3/4" DIAMETER CONDUIT AS HIGH AS POSSIBLE OR 12" MINIMUM ABOVE FINISH CEILING (FROM ADJACENT CORRIDOR) TO EACH PRIVATE OFFICE, FOR FUTURE SOUND MASKING SYSTEM INSTALLATION

7. PROVIDE SHEET METAL BLOCKING IN WALL FOR ALL WALL HUNG CASEWORK CABINETRY AND WALL MOUNTED MONITORS

8. RECEPTACLE, THERMOSTAT AND SWITCH LOCATIONS TO MATCH LOCATIONS SHOWN IN ARCHITECTURAL ELEVATIONS; REFER TO MECH AND ELEC FOR MORE INFORMATION

LEGEND

- NEW CONSTRUCTION
- EXISTING CONSTRUCTION, TO REMAIN
- ELECTRICAL FLOOR BOX
- NOT IN CONTRACT
- EXEMPT

GENERAL NOTES - PLANS L24677

1/8" = 1'-0"

GENERAL NOTES

1. FOR SYMBOLS AND ABBREVIATIONS, SEE SHEET A0.02.

2. FOR INTERIOR PARTITION TYPES, SEE SHEET A8.01.

3. TYPICAL PARTITION TYPE IS FA / 0 / 3, UNLESS OTHERWISE NOTED.

4. FOR LIFE SAFETY SUMMARY AND PLANS, SEE LS SHEETS.

5. FOR DOOR SCHEDULE AND DOOR TYPES, SEE SHEET A8.03.

6. FOR DOOR HARDWARE, SEE SPECIFICATION SEC. 087100.

7. FOR ROOM FINISH SCHEDULE, SEE SHEET A8.50.

8. PLAN DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY, CENTERLINE OF COLUMN, OR FACE OF CMU, UNLESS OTHERWISE NOTED.

9. FOR TOILET ACCESSORIES SCHEDULE, SEE SPECIFICATION SEC. 102800.

A2 - FLOOR PLAN - Notes D61041

1/4" = 1'-0"

1. SEE SHEET A8.01 FOR PARTITION TYPE SCHEDULE.
2. REFER TO BASE BUILDING DOCUMENTS FOR WALLS TAGGED "NOTE", GYPSUM BOARD FINISH ALREADY PROVIDED BY BASE BUILDING.
3. NON RATED PARTITIONS TYPE F/A/4 UNLESS OTHERWISE NOTED.
4. PARTITIONS SHALL BE FINISHED TO A MINIMUM OF LEVEL 4 AND PAINTED, SEE FINISH SCHEDULE.
5. STUDS TO STRUCTURE AT PARTITIONS AS REQUIRED FOR BRACING.
6. PROVIDE BACKING AT ALL WALL FOR CEILING MOUNTED EQUIPMENT INCLUDING AT AV WALLS FOR FLAT SCREENS, WALL MOUNTED AND FULL HEIGHT CASEWORK, AND WHERE SHOWN ON ELEVATIONS. SEE A8.00 SHEETS FOR ADDITIONAL INFORMATION.
7. ANCHOR ALL CASEWORK TO FLOOR WHERE LOCATED NEXT TO PARTIAL HEIGHT PARTITIONS.
8. SEE SHEET A10.01 FOR FLOOR FINISH PLANS
9. PROVIDE PUTTY PADS AT ALL OUTLETS, JUNCTION BOXES, SWITCHES. SIZE ALL PENETRATIONS AT SOUND RATED WALLS SO THERE IS NO DIRECT CONTACT WITH STRUCTURE AND SEAL AIRTIGHT WITH ACOUSTICAL SEALANT BOTH SIDES OF PENETRATION. REFER TO WALL TYPE DESIGNATION FOR LOCATIONS.
10. FURNITURE SHOWN FOR INFORMATION ONLY.
11. DIMENSIONS ARE FOR REFERENCE ONLY. CONTRACTOR TO VERIFY ALL DIMENSIONS.
12. DIMENSIONS TAKEN FROM GRID CENTERLINE TO FACE OF FINISH UNLESS OTHERWISE NOTED.
13. ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDANT.
14. EQUIPMENT IS SHOWN FOR REFERENCE ONLY AND IS NOT INCLUDED IN CONTRACT. SEE SHEET A10.02 FOR INFORMATION.
15. SEE PLUMBING DRAWINGS AND A8.07 FOR FLOOR DRAIN DETAIL IN DIAPER/TOILET ROOMS 1 AND 2.
16. FINAL ROOM NUMBERS TO BE DETERMINED BY OWNER. CONFIRM WITH ARCHITECT, SIGNAGE CONSULTANT AND OWNER.

3

GENERAL NOTES - PLANS P23198

12" = 1'-0"

1. FOR PARTITION TYPES, SEE A8.01

2. FOR INTERIOR PARTITION DETAILS, SEE A8.02-A8.08

3. WALL TYPE IS FA 0|4, UNO

4. FOR AIR LEAKAGE CONTROL LOCATIONS, LEGEND, AND DETAILS, SEE OVERALL PLANS IN A2 FLOOR PLANS, LEGEND ON A2.03-TI, A8.07, AND A8.08

5. FOR BACKING PLATE SCHEDULE, SEE A8.02

6. FOR ABBREVIATIONS, SEE A0.10

7. FOR DOOR SCHEDULES, SEE A8.12 - A8.16

8. FOR MEDICAL EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES, SEE A12 EQUIPMENT PLANS

9. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES ON A8.21 - A8.25 AND A10 FINISH PLANS

10. FOR DIMENSION STANDARDS, SEE A0.10

11. VERIFY ROUGH-IN DIMENSIONS OF ALL EQUIPMENT WITH MANUFACTURER AND/OR WITH REUSED OR EXISTING EQUIPMENT.

12. PROVIDE P-LAM SOFFIT FILLER PANEL ABOVE ALL UPPER CABINET LOCATIONS. EXTEND TO CEILING, UNO

13. FOR P-TUBE STATION LOCATIONS AND DETAILS, SEE A2 FLOOR PLANS AND A8.90 - A8.91

14. FOR RADIATION PROTECTION LOCATIONS, SEE A2 FLOOR PLANS

15. REFERENCE BIPLANE VENDOR DRAWINGS FOR ELECTRICAL PULL BOXES AND DUCTS IN CATH LAB 1 FB.6.511, CATH LAB/EP2 FB.6.516, CONTROL/TEAM FB.6.513 AND EQUIPMENT FB.6.517

GENERAL NOTES - FLOOR PLAN S23683

12" = 1'-0"

1. PROVIDE FLOOR BOXES IN OPEN OFFICE, OPEN COLLABORATION, LOUNGE COLLABORATION, FAC CONTROL ROOM, AND ALL MEETING ROOMS FOR POWER AND DATA.
2. SEE SHEET A8.15 FOR ROOM FINISH SCHEDULE.
3. SEE SPECIFICATION SECTION 01 12 00 FOR FINISH LEGEND.
4. SEE ENLARGED PLANS FOR ADDITONAL NOTES, TAGS, AND DIMENSIONS.
5. SEE FLOOR FINISH PLANS FOR FLOOR FINISHES AND MATERIAL TRANSITIONS.
6. SEE REFLECTED CEILING PLANS FOR CEILING FINISHES, LIGHT FIXTURES AND DEVICES AND LOCATIONS.
7. PORTABLE ASSISTIVE LISTENING SYSTEM ACCOMMODATION WILL BE MADE ON AN AS REQUESTED BASIS, AS REQUIRED PER CBC-11B-216.10,

GENERAL NOTES - A2.02 P24785

12" = 1'-0"

1. REFER TO LIFE SAFETY PLANS FOR LOCATION AND EXTENT OF RATED ASSEMBLIES & HAZARDOUS MATERIALS CONTROL AREA BOUNDARIES.
2. REFER TO A8.01 FOR INTERIOR PARTITION TYPES.
3. SEE STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR SYSTEMS COORDINATION AND ADDITIONAL OPENINGS IN WALLS.
4. NOT USED
5. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS TO BE PARTITION TYPE B A 4 UNLESS NOTED OTHERWISE.
6. REFER TO SHEETS A8.20, A8.21, A8.22 FOR ROOM FINISH SCHEDULES. REFER TO FINSIH PLANS AND INTERIOR ELEVATIONS FOR EXTENT OF FINISHES.
7. REFER TO LF SERIES FOR LABORATORY CASEWORK AND EQUIPMENT LAYOUT.
8. DIMENSIONS TAKEN FROM GRID CENTERLINE AND TO FACE OF FINISH UNLESS NOTED OTHERWISE.
9. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, MONITORS AND OTHER SUPPORTED ITEMS, REFER TO A8.02 FOR TYPICAL BACKING DETAILS.
10. ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDENT TREATED.
11. REFER TO SHEET A7.08 FOR TYPICAL OFFICE ELEVATIONS.
12. REFER TO SHEET A8.10, A8.11 & A8.12 FOR DOOR SCHEDULE AND SPECIFICATION SECTION 087100 FOR DOOR HARDWARE SETS.
13. SEE SPECIFICATION SECTION 105613 FOR UTILITY SHELVING UNIT SIZES.
14. REFER TO SHEET A6.08 FOR FLOOR BOX LOCATIONS IN CONFERENCE ROOMS.

GENERAL NOTES - FLOOR PLANS P23156

12" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO BE TO FINISHED FACE OF PARTITION U.N.O.
2. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO BRING TO THE ATTENTION OF THE ARCHITECT ANY FIELD CONDITIONS THAT DO NOT ALLOW CONSTRUCTION OR INSTALLATION AS SHOWN.
3. DO NOT SCALE DRAWINGS. DIMENSIONS AS INDICATED TAKE PRECEDENT.
4. REPAIR ALL EXISTING BASE BUILDING PARTITIONS, DOORS, FRAMES, ETC. THAT ARE TO RECEIVE A NEW FINISH. G.C. TO TOUCH UP ALL EXISTING SUITE PARTITIONS, DOORS, FRAMES, MILLWORK, ETC. TO REMAIN AS REQUIRED TO APPEAR AS NEW. G.C. TO BRING TO THE ATTENTION OF THE ARCHITECT, ANY AREAS REQUIRING MAJOR REPAIR THAT CANNOT BE DONE WITH TOUCH UP ONLY, SO IT CAN BE PRICED ACCORDINGLY.
5. REFER TO LIFE SAFETY, T2.00 SERIES SHEETS FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES.
6. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.
7. DIMENSIONS BETWEEN/FROM EXISTING GRIDLINES, EXTERIOR ENCLOSURE, INTERIOR PARTITIONS, ETC. TO BE VERIFIED IN FIELD.

zgf - General Notes_Floor Plan L23723

1/8" = 1'-0"

GENERAL NOTES:

1. SEE SHEET TI8.01 FOR PARTITION TYPE INFORMATION
2. SEE SHEET TI8.02 FOR TYPICAL PARTITION DETAILS
3. SEE SHEET TI8.03 FOR ACCESSIBILITY DIAGRAMS

PLAN NOTES - FLOORS 1-4 S21458

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE **(FA)**.

2. **PARTITIONS ARE CENTERED ON BUILDING PLANNING MODULE UNLESS DIMENSIONED OR NOTED.**

3. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

4. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - FLOOR PLAN S26231

12" = 1'-0"

OF ALL SIP WALLS FOR THERMAL BARRIER PER IBC CHAPTER 26 03.4

TION AT EXTERIOR WALL AND SOFFIT ASSEMBLIES
T OF ALL FIRE RATED ASSEMBLIES
DDITIONAL OPENINGS IN WALLS.
STALLED WITH MANUALLY OPERATED ROLLER SHADES
ISIONS AND WORK POINTS.
TY, ARE SHOWN FOR COORDINATION WITH FINISHES. SEE STRUCTURAL FOR SHEAR & BEARING WALL INFORMATION
L TAG (* OR ** SEE A8.10)
TIONS.

GENERAL NOTES - PLAN P21964

12" = 1'-0"

LEGEND:

- EXISTING TO REMAIN
- NEW
- EXPANSION JOINT
- PROPERTY LINE
- TRAFFIC COATING
- DIRECTIONAL ARROW TRAFFIC DECAL, TYP.

GENERAL NOTES - PARKING:

1. VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK.
2. REFER TO SHEET G0.01.C FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, & DIMENSIONAL STANDARDS
3. REFER TO LIFE SAFETY LS* SERIES DRAWINGS IN PACKAGE A FOR LOCATION & EXTENT OF ALL RATED ASSEMBLIES
4. REFER TO A8* SERIES OF PACKAGE A FOR PARTITION SCHEDULE & DETAILS.
5. SEE ELEVATIONS FOR EXTERIOR ASSEMBLY TYPES NOT NOTED IN PLAN.
6. UNO, ALL PARTITIONS ARE: M 0 8
7. REFER TO A5* SERIES DRAWINGS FOR STAIRS & ELEVATORS
8. WHERE PORTIONS OF PLANS ARE ENLARGED, SEE A6* SERIES DRAWINGS. PARTITIONS WITHIN ENLARGED PLANS ARE ANNOTATED WITHIN THE ENLARGED PLAN.

FLOOR PLANS GENERAL NOTES - PARKING D24085

1/16" = 1'-0"

1. REFER TO SHEET A8.00 FOR WALL TYPES.

2. PATCH, REPAIR AND PREP WALLSURFACES TO RECEIVE NEW FINISHES, U.N.O.

3.PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, NEW TENANT PROVIDED FLAT SCREEN MONITORS AND OTHER WALL SUPPORTED ITEMS. COORDINATE REQUIREMENTS WITH TENANT'S AV VENDOR. SE A8.01 FOR WALL BACKING INFORMATION.

4.ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDANT.

5. ALL RELITE GLASS TO BE TEMPERED.

6. SEE ROOM FINISH SCHEDULE ON SHEET A7.20 AND FINISH PLANS FOR LOCATION AND EXTENT OF FINISHES.

7. ALL DIMENSIONS SHOWN ARE TO FACE OF PARTITION, CENTERLINE OF COLUMN, OR FACE OF CONCRETE MASONRY UNLESS NOTED OTHERWISE.

8. PROVIDE BLACK CAULK AND SEALANT AT ALL BUTT-JOINTED GLAZING.

9. REFER TO SHEET A8.02 FOR DOOR SCHEDULE, DOOR TYPES AND DOOR HARDWARE.

10. EXISTING RESTROOM PLUMBING FIXTURES, LIGHT FIXTURES, TOILET ACCESSORIES AND FINISHES ARE TO REMAIN UNO.

11. PATCH AND REPAIR SITE EXPLORATION HOLES, OPENINGS IN WALLS.

GENERAL NOTES-FLOOR PLAN P23508

12" = 1'-0"

1. SEE SHEET A0.002 FOR SYMBOL LEGEND AND ABBREVIATIONS.
2. SEE SHEET A0.011 FOR LOCATIONS OF FIRE RATED ASSEMBLIES.
3. SEE SHEET A8.102 FOR OPENING SCHEDULE.
4. SEE SHEET A8.001 FOR PARTITION SCHEDULE.
5. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.
6. SEE SHEET A8.101 FOR DIMENSIONS OF DOOR TO WALL, UNLESS NOTED OTHERWISE.
7. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
8. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS ARE C/A/2 UNO.
9. SEE STRUCTURAL FOR CEILING HUNG TOILET PARTITION SUPPORT

GENERAL NOTES, FLOOR PLAN, OVERALL (PH 1) S24925

12" = 1'-0"

GENERAL NOTES

1. VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK.
2. REFER TO SHEET G0.01.A FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, & DIMENSIONAL STANDARDS
3. REFER TO LIFE SAFETY LS* SERIES DRAWINGS IN PACKAGE A FOR LOCATION & EXTENT OF ALL RATED ASSEMBLIES
4. REFER TO SLAB EDGE DRAWINGS FOR DIMENSIONS OF SLAB EDGES, CURBS, EQUIPMENT/HOUSEKEEPING PADS, AND OPENINGS.
5. REFER TO A3.21.D FOR EXTERIOR PARTITIONS AND MATERIAL SCHEDULE
6. REFER TO A5* AND A6* SERIES FOR PARTITION TYPES
7. REFER TO A7.01.D FOR TYPICAL WALL FRAMING AND BLOCKING DETAILS
8. REFER TO A8* SERIES FOR PARTITION SCHEDULE AND DOOR SCHEDULE & DETAILS
9. REFER TO A8.04.D FOR GENERAL WALL FRAMING AND BLOCKING DETAILS.
10. PARKING LEVEL & PHASE 1 PLANS ARE ISSUED UNDER SEPARATE COVER
11. SEE ELEVATIONS FOR EXTERIOR ASSEMBLY TYPES
12. REFER TO PACKAGE D DRAWINGS FOR TYPICAL ROOF DETAILS

LEGEND:

EXISTING

NEW

FALL ARREST ANCHOR

PROPERTY LINE

FLOOR PLANS GENERAL NOTES PHASE 2 D24085

1/16" = 1'-0"

1. SEE SHEET A0.002 FOR SYMBOL LEGEND AND ABBREVIATIONS.
2. SEE SHEET A0.012 FOR LOCATIONS OF FIRE RATED ASSEMBLIES.
3. SEE SHEET A8.103 FOR OPENING SCHEDULE.
4. SEE SHEET A8.001 FOR PARTITION SCHEDULE.
5. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.
6. SEE SHEET A8.101 FOR DIMENSIONS OF DOOR TO WALL, UNLESS NOTED OTHERWISE.
7. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
8. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS ARE C/A/2 UNO.
9. SEE STRUCTURAL FOR CEILING HUNG TOILET PARTITION SUPPORT

GENERAL NOTES, FLOOR PLAN, OVERALL (PH 2) S24925

12" = 1'-0"

1. SEE ENLARGED FLOOR PLANS ON **A6 SERIES** FOR ADDITIONAL DIMENSIONING AND PARTITION TYPES.
2. SEE **A8.11** FOR DOOR AND FRAME TYPES AND SCHEDULE.
3. SEE **A9 SERIES** FOR REFLECTED CEILING PLANS.
4. SEE **A8.21** FOR FINISH SCHEDULE AND **A10.01** FOR FINISH PLAN.
5. CONTRACTOR TO FIELD-VERIFY ALL EXISTING PENETRATIONS RELATIVE TO NEW CONSTRUCTION, TYP.

GENERAL NOTES - OVERALL FLOOR PLAN S24168

1/4" = 1'-0"

1. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

2. ALL NEW/UPDATED SIGNAGE TO BE OWNER FURNISHED/OWNER INSTALLED.

GENERAL NOTES - FLOOR PLAN S26306

12" = 1'-0"

1. ALL DIMENSIONS ARE TO FINISHED FACE OF PARTITION, UNLESS NOTED OTHERWISE.

2. SEE PARTITION SCHEDULE ON SHEET A8.01 FOR PARTITION TYPES.

3. REFER TO THE PROJECT MANUAL APPENDIX FOR THE BELIMED INSTALLATION DRAWINGS: (2) STERILIZERS, (2) WASHERS, AND (1) ULTRASONIC CLEANER.

FLOOR PLAN GENERAL NOTES S24570

1/4" = 1'-0"

1. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.
2. FURNITURE IS OFOI AND SHOWN FOR REFERENCE ONLY.
3. REFER TO SHEET A8.16 FOR EQUIPMENT SCHEDULE.
4. REFER TO SHEETS A2.16A & A2.16B FOR ALL PARTITION DIMENSIONS & DESIGNATIONS NOT SHOWN HERE.

GENERAL NOTES - FLOOR PLANS P24219

1/4" = 1'-0"

A. TYPICAL DOUBLE-SIDED PARTITION, UNO:

B. SEE **A8.01** FOR PARTITION TYPES.

C. REFER TO LIFE SAFETY, **A.021** SHEET FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES.

D. REFER TO **A7** AND **A10 SERIES** FOR INTERIOR FINISHES.

E. REFER TO SHEET **A8.10** FOR DOOR AND FRAME SCHEDULE AND DETAIL REFERENCES.

F. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.

G. NEW WALL FINISH FACE TO ALIGN WITH EXISTING WALL FINISH FACE, UNO.

H. CONFIRM EXISTING FIRE RATING ASSEMBLIES.

I. INTERIOR DIMENSIONS ARE TO FACE OF FINISH, UNO.

J. SEE RCP FOR TOP OF WALL DETAIL BETWEEN PATIENT ROOMS.

H. PATCH FLOOR SLAB TO MATCH EXISTING WHERE DEMO OCCURS

GENERAL NOTES - PLANS S23618

12" = 1'-0"

1. UNLESS NOTED OTHERWISE
   A. DIMENSIONS FOR COLUMNS ARE TO CENTER OF COLUMNS
   B. INTERIOR WALLS ARE DIMENSIONED TO DOMINANT FACE OF THE WALL
   C. DIMENSIONS FOR CABINETS AND CASEWORK ARE TO FACE OF CABINET
2. WHERE A DIMENSION IS NOT SHOWN ON A LARGE SCALE PLAN, REFER TO ENLARGED PLANS OR DETAILS.
3. WHERE DOORS ARE LOCATED ADJACENT TO PERPENDICULAR WALLS, THE DISTANCE FROM FACE OF WALL TO DOOR OPENING IS 4", U.N.O.

GENERAL NOTES - FLOOR PLAN DIMENSION NOTES N24448

12" = 1'-0"

1. REFER TO SHEET A8.01 FOR PARTITION TYPE SCHEDULE.

2. FEC = FIRE EXTINGUISHER CABINET, 75' MAX TRAVEL DISTANCE BETWEEN FIRE EXTINGUISHERS.

3. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.

4. SEE SHEET A8.02, A8.03 & A8.04 FOR PARTITION DETAILS.

5. REFER TO A10.21 FOR FLOOR FINISH PLAN, A8.14 FOR ROOM FINISH SCHEDULE, AND ELEVATONS AS REFERENCED FOR EXTENT OF FINISHES.

6. REFER TO SHEET A8.17 FOR EQUIPMENT SCHEDULE.

7. REFER TO SHEET A6.15 FOR ENLARGED PLANS, AND DETAILS FOR TOILETS AND KITCHEN.

GENERAL NOTES - FLOOR PLAN CHILDCARE P24219

1/4" = 1'-0"

1. CONTRACTOR TO VERIFY EXISTING CONDITIONS

2. FOR TYPICAL FLOOR TRANSITION DETAILS THAT ARE NOT KEYED ON PLANS REFER TO SHEET A8.04.

3. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.

4. MEDICAL EQUIPMENT AND FURNITURE SHOWN SCREENED FOR REFERENCE

5. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.

6. EXISTING EXTERIOR WINDOW COVERINGS REMAIN. REMOVE PRIOR TO CONSTRUCTION, CLEAN, AND REINSTALL. MODIFY EXISTING WINDOW COVERINGS OR PROVIDE NEW BUILDING STANDARD EXTERIOR WINDOW COVERINGS AT NEW ROOM CONFIGURATIONS.

7. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - PLAN S25624

12" = 1'-0"

1. REFER TO SHEET A8.00 FOR PARTITION TYPES.

2. ~~DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY OR FACE OF CONCRETE UNLESS OTHERWISE NOTED.~~

3. PARTITION TYPES IS FA 04 UNLESS OTHERWISE NOTED.

4. F.E.C. = FIRE EXTINGUISHER CABINET, 75' MAX TRAVEL DISTANCE BETWEEN FIRE EXTINGUISHERS.

5. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.

6. FOR SHEAR WALL LOCATIONS SEE STRUCTURAL.

7. FOR FURTHER PARTITION INFORMATION, SEE ENLARGED FLOOR PLANS.

8. SEE SHEET A8.01 FOR FIRE RATED DETAILS AT FLOORS, CEILINGS, ROOFS, AND PARTITIONS.

9. REFER TO ENLARGED PLANS FOR WALL TYPES AT TYPICAL LOCATIONS.

10. FURNITURE AND RESIDENTIAL APPLIANCES ARE OFOI AND SHOWN FOR REFERENCE ONLY. REFER TO FURNITURE AND EQUIPMENT PLANS.

11. SEE SHEET A2.02 FOR INTERIOR PARTITION INFORMATION NOT SHOWN OR REFERENCED HERE.

GENERAL NOTES - FLOOR PLANS P23241

1/4" = 1'-0"

GENERAL NOTES, FLOOR PLAN

1. REFER TO LF SERIES DRAWINGS FOR EGRESS AND LIFE SAFETY DIAGRAMS
2. REFER TO G.03 FOR DIMENSIONING STANDARDS
3. TYPICAL INTERIOR PARTITION IS TYPE FA WITH 6" STUD AND GYPSUM BOARDS ON BOTH SIDES EXTENDED TO UNDERSIDE OF STRUCTURE ABOVE UNLESS NOTED OTHERWISE. REFER TO WALL TAGS FOR ATYPICAL INTERIOR PARTITION TYPES.
4. U.N.O. ALL INTERIOR DOOR HINGE-SIDE JAMBS ARE 6" FROM FACE OF ADJACENT PARTITION.
5. REFER TO G.03 AND 04 FOR FLOOR CLEARANCE AT DOORS AND PLUMBING FIXTURES.
6. REFER TO A6 SERIES ENLARGED PLANS FOR ADDITIONAL INFORMATION INCLUDING PARTITION TYPES.
7. REFER TO A6 SERIES, ENLARGED PLANS FOR TOILET AND SHOWER STALL LAYOUT.
8. REFER TO A8.01 FOR PARTITION TYPES.
9. REFER TO A8.09 FOR EQUIPMENT SCHEDULE AND ACCESSORY LEGEND AND A11 SERIES FOR LOCATION OF FURNITURE, FIXTURE AND EQUIPMENT AND CODE REQUIRED SIGNAGE.
10. PROVIDE CONTROL JOINTS IN GYPSUM BOARD PARTITIONS WHEN UNINTERRUPTED LENGTH EXCEEDS 40 FEET. COORDINATE LOCATION WITH ARCHITECT PRIOR TO INSTALLATION

GENERAL NOTES - PLANS P23638

12" = 1'-0"

1. FOR PARTITION TYPES, SEE A8.01

2. FOR INTERIOR PARTITION DETAILS, SEE A8.02-A8.08

3. WALL TYPE IS FA / 04, UNO

4. FOR ABBREVIATIONS, SEE A0.10

5. FOR DOOR SCHEDULES, SEE A8.12

6. FOR EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES, SEE A12 EQUIPMENT PLANS

7. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES IN A8.25, AND A10 FINISH PLANS

8. FOR DIMENSION STANDARDS, SEE A0.10

9. VERIFY ROUGH-IN DIMENSIONS OF ALL EQUIPMENT WITH MANUFACTURER AND/OR WITH REUSED OR EXISTING EQUPMENT.

10. PROVIDE P-LAM SOFFIT FILLER PANEL ABOVE ALL UPPER CABINET LOCATIONS. EXTEND TO CEILING, UNO

GENERAL NOTES - FLOOR PLAN (RIVER) S23683

12" = 1'-0"

GENERAL PLAN NOTES

1. REFER TO SHEET A0.00 FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, AND DIMENSIONAL STANDARDS
2. REFER TO LIFE SAFETY DRAWINGS FOR LOCATION AND EXTENT OF ALL RATED ASSEMBLIES. IN CASE OF DISCREPANCIES WITH PARTITION DESIGNATIONS/FIRE RATINGS, LIFE SAFETY DRAWINGS ALWAYS PREVAIL.
3. REFER TO A8 SERIES FOR DOOR SCHEDULE AND DETAILS.
4. REFER TO SHEET A8 SERIES FOR PARTITION TYPES.
   A. ALL PARTITIONS DESIGNATIONS TO BE **FA** UNO
   B. ALL PARTITIONS TO HAVE **3 5/8"** STUDS UNO
   C. ALL PARTITION HEIGHT DESIGNATIONS TO BE **0** UNO
5. SEE STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR SYSTEMS COORDINATION AND ADDITIONAL OPENINGS IN WALLS AND FLOORS.
6. REFER TO FINISH PLANS AND INTERIOR ELEVATIONS FOR EXTENT OF FINISHES.
7. DIMENSIONS TAKEN FROM GRID CENTERLINE AND TO FACE OF FINISH UNLESS NOTED OTHERWISE.
8. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, MONITORS, SEALS/LOGOS AND OTHER WALL SUPPORTED ITEMS.
9. ALL DOOR JAMBS ARE LOCATED (4)" FROM ADJACENT WALL UNLESS OTHERWISE NOTED.
10. REFER TO A8 SERIES FOR HEADER AND JAMB DETAIL AT INTERIOR WALL OPENINGS.
11. REFER TO A11 SERIES FOR EQUIPMENT SCHEDULES AND EQUIPMENT PLANS

GENERAL NOTES - PLANS D25278

12" = 1'-0"

GENERAL NOTES - FLOOR PLANS

1. EXISTING CONSTRUCTION SHOWN HALFTONE.
2. TYPICAL WALLS TYPE FA| 0 | 4 UNO.
3. 1HR PARTITION TYPE F | 1 | 4 UNO.
4. SEE LS SERIES SHEETS FOR WALL RATING LOCATION DIAGRAM IN ADDITION TO THESE DRAWINGS.
5. SEE A5.00 SERIES FOR WALL TYPES AT ELEVATORS AND STAIRS
6. SEE PARTITION DETAILS A8.01 FOR PARTITION TYPES
7. DIMENSIONS TO FINISH FACE, UNO
8. AT EXTERIOR WALLS SEE ENLARGED DETAILS FOR DIMENSION POINTS
9. SEE A3 SERIES ELEVATIONS FOR EXTERIOR WALL ASSEMBLY
10. FOR TYPICAL ROOF ASSEMBLIES, SEE 1/A4.10
11. NOTE TYPICAL WALL BASE DETAIL 13/A8.02 FOR WALL BASE AT ALL ELEVATOR LOBBIES FOR PREVENTION OF WATER INFILTRATION.
12. SEE SHEET A8.20 FOR TYPICAL MOUNTING HEIGHTS OF PLUMBING, CONTROLS AND ACCESSORIES
13. EVERY ROOM OR SPACE THAT IS AN ASSEMBLY OCCUPANCY SHALL HAVE THE OCCUPANT LOAD OF THE ROOM OR SPACE POSTED IN A CONSPICUOUS PLACE.
14. ROOMS CONTAINING FIRE PROTECTION EQUIPMENT (AIR-CONDITIONING SYSTEMS, FIRE SPRINKLER RISERS (RISER ROOM) AND VALVES OR OTHER FIRE DETECTION (FACP), SUPPRESSION OR CONTROL ELEMENTS (FCC)) AND ELECTRICAL, MECHANICAL AND ELEVATOR MACHINE ROOMS SHALL BE IDENTIFIED IN AN APPROVED MANNER. REQUIRED SIGNS SHALL BE CONSTRUCTED OF DURABLE MATERIALS, PERMANENTLY INSTALLED AND READILY VISIBLE.
15. STAIRWAYS SHALL BE MARKED AT STREET AND FLOOR LEVELS WITH A SIGN INDICATING THAT THE STAIRWAY CONTINUES TO THE ROOF IN ACCORDANCE WITH PORTLAND FIRE CODE 1022.9

GENERAL NOTES - PLANS P24169

12" = 1'-0"

1. REFER TO LIFE SAFETY PLANS FOR LOCATION AND EXTENT OF RATED ASSEMBLIES & HAZARDOUS MATERIALS CONTROL AREA BOUNDARIES.

2. REFER TO A8.01 FOR INTERIOR PARTITION TYPES.

3. SEE STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR SYSTEMS COORDINATION AND ADDITIONAL OPENINGS IN WALLS.

4. NOT USED

5. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS TO BE PARTITION TYPE B/A4 UNLESS NOTED OTHERWISE.

6. REFER TO SHEETS A8.20, A8.21, A8.22 FOR ROOM FINISH SCHEDULES. REFER TO FINSIH PLANS AND INTERIOR ELEVATIONS FOR EXTENT OF FINISHES.

7. REFER TO LF SERIES FOR LABORATORY CASEWORK AND EQUIPMENT LAYOUT.

8. DIMENSIONS TAKEN FROM GRID CENTERLINE AND TO FACE OF FINISH UNLESS NOTED OTHERWISE.

9. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, MONITORS AND OTHER SUPPORTED ITEMS, REFER TO A8.02 FOR TYPICAL BACKING DETAILS.

10. ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDENT TREATED.

11. REFER TO SHEET A7.08 FOR TYPICAL OFFICE ELEVATIONS.

12. REFER TO SHEET A8.10, A8.11 & A8.12 FOR DOOR SCHEDULE AND SPECIFICATION SECTION 087100 FOR DOOR HARDWARE SETS.

13. SEE SPECIFICATION SECTION 105613 FOR UTILITY SHELVING UNIT SIZES.

14. REFER TO SHEET A6.08 FOR FLOOR BOX LOCATIONS IN CONFERENCE ROOMS.

GENERAL NOTES - FLOOR PLANS P23156

12" = 1'-0"

1. REFER TO SHEET A8.00 FOR PARTITION TYPES.

2. REFER TO STRUCTURAL SHEETS FOR STRUCTURAL WALL LOCATIONS

3. REFER TO A0.XX SHEETS FOR PARTION RATINGS

4. DIMENSIONS ARE TO FACE OF STUD OR FACE OF MASONRY/CONCRETE UNLESS OTHERWISE NOTED. SEE A4.XX SHEETS FOR OPENING DETAILS.

5. F.E.C. = FIRE EXTINGUISHER CABINET, 75' MAX DISTANCE BETWEEN F.E.C.'S

6. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.

7. FOR TYPICAL DIMENSIONS SEE ENLARGED FLOOR PLANS.

8. SEE SHEET A8.01 FOR FIRE RATED DETAILS AT FLOORS, CEILINGS, ROOFS, AND PARTITIONS.

9. REFER TO ENLARGED PLANS FOR WALL TYPES AT TYPICAL LOCATIONS.

10. EQUIPMENT IS SHOWN FOR REFERENCE ONLY. REFER TO FURNITURE AND EQUIPMENT PLANS.

11. FOR LEVEL 3 DIMENSIONS, REFERENCE DIMENSIONS SHOWN ON LEVEL 2, UNLESS OTHERWISE NOTED.

12. PARTITION TYPE IS A/04 UNLESS OTHERWISE NOTED.

GENERAL NOTES - PLANS P26251

12" = 1'-0"

GENERAL NOTES

1. FOR SYMBOLS AND ABBREVIATIONS, SEE SHEET A0.02.

2. FOR INTERIOR PARTITION TYPES, SEE SHEET A8.01.

3. TYPICAL PARTITION TYPE IS FA / 0 / 3, UNLESS OTHERWISE NOTED.

4. FOR LIFE SAFETY SUMMARY AND PLANS, SEE LS SHEETS.

5. FOR DOOR SCHEDULE AND DOOR TYPES, SEE SHEET A8.03.

6. FOR DOOR HARDWARE, SEE SPECIFICATION SEC. 087100.

7. FOR ROOM FINISH SCHEDULE, SEE SHEET A8.50.

8. PLAN DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY, CENTERLINE OF COLUMN, OR FACE OF CMU, UNLESS OTHERWISE NOTED.

9. FOR TOILET ACCESSORIES SCHEDULE, SEE SPECIFICATION SEC. 102800.

A2 - FLOOR PLAN - Notes D61041

1/4" = 1'-0"

1. REFER TO 0-I-A11 FOR DIMENSIONING STANDARDS.
2. REFER TO CODE SUMMARY SHEETS FOR LOCATION & EXTENT OF ALL FIRE RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS & OTHER LIFE SAFETY REQUIREMENTS.
3. REFER TO 0-I-M01 FOR PARTITION INFORMATION.
4. PROVIDE BACKING TO SUPPORT HANDRAILS & MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS. REFER TO 0-I-M10 FOR BACKING INFORMATION.
5. PROVIDE GYPSUM WALL BOARD ON INTERIOR FACE OF EXTERIOR WALL.
6. UNLESS NOTED OTHERWISE, ALL WALLS TO BE:

   GA
   A 3

7. REFER GENERAL SET SHEET TO 0-I-M13 FOR SEMI-RECESSED FIRE EXTINGUISHER CABINET MOUNTING DETAILS.

GENERAL NOTES - PLANS S24177

12" = 1'-0"

1. SEE SHEET A002 FOR DIMENSIONING STANDARDS AND ADDITIONAL GENERAL NOTES.
2. UNO IN PLAN, CENTERLINE OF PARTITIONS ARE TO CENTERLINE TO GRIDLINES OR WINDOW MULLIONS.
3. UNO IN PLAN, DOOR LOCATIONS ARE PER SHEET A602.
4. EXTERIOR ASSEMBLIES PER SHEETS A501.
5. SEE A601 FOR PARTITION SCHEDULE.
6. SEE LIFE SAFETY DRAWINGS FOR LOCATION AND EXTENT OF ALL FIRE-RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS AND OTHER LIFE SAFETY REQUIREMENTS.
7. SEE ENLARGED PLANS FOR ADDITIONAL INFORMATION.
8. SEE SHEETS A521 AND A522 FOR TYPICAL INTERIOR PARTITION DETAILS AND BACKING PLATE INFORMATION.
9. PROVIDE WALL BACKING TO SUPPORT HANDRAILS AND MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS.
10. SEE A3 AND A4 SERIES FOR ADDITIONAL PLAN DIMENSIONS.
11. UNO, SEE A402 FOR TYPICAL MOUNTING HEIGHTS.
12. SEE A531 FOR TYPICAL CASEWORK DETAILS.
13. SEE A530 FOR TYPICAL FLOORING TRANSITION DETAILS.
14. SEE A523 FOR GENERAL WALL FINISH DETAILS.
15. SEE A7 SERIES FOR FINISH PLANS.
16. SEE A1 SLAB EDGE PLANS FOR CURBS, FLOOR DRAIN AND SINK LOCATIONS.
17. PROVIDE FIRE-TREATED PLYWOOD AT TELECOM, AND ELECTRICAL ROOMS.
18. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS AND SLABS.
19. CODE REQUIRED SIGNAGE TO BE PROVIDED FOR EVERY ROOM OR SPACE THAT IS AN ASSEMBLY OCCUPANCY SHOWING THE OCCUPANT LOAD OF THE ROOM OR SPACE POSTED IN A CONSPICUOUS PLACE PER IBC-1004.3

GENERAL NOTES - PLANS S24586

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE **(FLOOR TO STRUCTURE ABOVE)**.
2. UNLESS NOTED OTHERWISE, DEMISING PARTITIONS ARE TO BE TYPE **(FLOOR TO STRUCTURE ABOVE)**.
3. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.
4. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
5. DOOR HARDWARE IS TO INCLUDE BUILDING STANDARD LEVER HANDLES WITH LATCHSETS UNLESS NOTED OTHERWISE.
6. EXISTING EXTERIOR WINDOW COVERINGS REMAIN. REMOVE PRIOR TO CONSTRUCTION, CLEAN, AND REINSTALL. MODIFY EXISTING WINDOW COVERINGS OR PROVIDE NEW BUILDING STANDARD EXTERIOR WINDOW COVERINGS AT NEW ROOM CONFIGURATIONS.
7. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - FLOOR PLAN S25724

12" = 1'-0"

GENERAL NOTES, FLOOR PLAN / COMMUNICATION PLAN

1. SEE ENLARGED PLANS FOR EACH OF THREE AREAS FOR DETAILED INFORMATION.

2. TYPICAL TENANT PARTITION TO BE TYPE 1 WITH INSULATION ABOVE CEILING TILE 4' FROM ALL WALLS, UNLESS NOTED OTHERWISE. PROVIDE TYPE 2 PARTITION WITH ONE SIDE OF GYPSUM BOARD EXTENDED TO UNDERSIDE OF STRUCTURE ABOVE WHERE NOTED ON FLOOR PLANS.

3. INSULATION MATERIALS TO MEET FLAME SPREAD INDEX OF NOT MORE THAN 25 AND A SMOKE-DEVELOPED INDEX OF NOT MORE THAN 450 PER SECTION 720 (OREGON SPECIALTY STRUCTURAL CODE).

4. ALL DIMENSIONS ARE TO FINISHED FACE OF PARTITION, UNLESS NOTED OTHERWISE.

5. PROVIDE REINFORCEMENT IN PARTITIONS AS REQUIRED FOR ANCHORAGE OF CASEWORK AND ANY WALL SUPPORTED EQUIPMENT AND/OR ACCESSORIES. VERIFY WITH PRODUCT SPECIFICATIONS.

6. ALL GLASS SHALL COMPLY WITH OSSC CHAPTER 24 AS INTERPRETED BY THE AUTHORITY HAVING JURISDICTION.

7. BUILD COLUMN FURRING AS TIGHT AS POSSIBLE USING 1-5/8" STUDS.

8. CONTACT CARLSON TESTING FOR SPECIAL INSPECTION. REFER TO STRUCTURAL DRAWINGS FOR INSPECTION REQUIREMENTS.

9. VERIFY CONTRACTOR SCOPE OF WORK WITH LEGACY INFORMATION SYSTEMS AND SERVICES (LEGACY I.S.) FOR VOICE AND DATA WIRING AND OTHER LOW-VOLTAGE WORK PROVIDED BY LEGACY CONTRACTED VENDORS. COORDINATE INSTALLATION AND CONNECTION TO BUILDING SYSTEMS.

10. CONTRACTOR TO PROVIDE ACCESSORIES LISTED IN ACCESSORY LEGEND ON SHEET A4.2.

11. PROVIDE 4' HIGH CORNER GUARD ABOVE 4" HIGH WALL BASE AT ALL EXTERIOR CORNERS IN PATIENT AREAS. EXACT LOCATIONS TO BE DETERMINED.

12. PRIOR TO ELECTRICAL BOX WALK, OBTAIN FURNITURE PLAN FROM LEGACY PROJECT MANAGER TO COORDINATE WITH PLACEMENT OF CHAIRS AND FILE DRAWERS.

13. CONTRACTOR TO COORDINATE FURNISHING (ART, FURNITURE, SIGNAGE) INSTALLATION WITH LEGACY CONTRACTED VENDORS THROUGH KELLY SMITH.

14. ELECTRICAL AND LOW-VOLTAGE INFORMATION ON FLOOR PLAN IS FOR REFERENCE ONLY FOR COORDINATION PURPOSE. REFER TO DRAWINGS PREPARED BY DESIGN-BUILD CONTRACTORS. SEE 1/A7.1 FOR NOTE ABOUT LOCATION OF ELECTRICAL BOXES IN EXAM ROOMS.

15. ELECTRICIAN TO COORDINATE LOCATION OF OUTLETS WITH CASEWORK DESIGN WHEN OUTLETS ARE SHOWN INSIDE CASEWORK. SEE INTERIOR ELEVATIONS.

16. AT FREE STANDING CASEWORK, ELECTRICAL CONDUIT AND LOW-VOLTAGE CABLES TO BE FED FROM TRENCHES IN CONCRETE FLOOR TO CASEWORK DIE WALL.

17. REFER TO DOCUMENTS PROVIDED BY VENDORS FOR DESIGN AND INFORMATION IN X-RAY, MAMMOGRAPHY AND DEXA ROOMS. OBTAIN FROM LEGACY.

18. CONFIRM ELECTRICAL SCOPE OF WORK FOR EXTERIOR SIGNAGE WITH LEGACY.

19. CONFIRM WITH KELLY SMITH CONTRACTOR SCOPE OF WORK FOR SECURITY SYSTEM PROVIDED BY SECURITY VENDOR.

GENERAL NOTES - FLOOR PLAN P22148

1/4" = 1'-0"

1. REFER TO SHEET A8.00 FOR WALL TYPES.

2. PATCH, REPAIR AND PREP WALLSURFACES TO RECEIVE NEW FINISHES, U.N.O.

3.PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK, NEW TENANT PROVIDED FLAT SCREEN MONITORS AND OTHER WALL SUPPORTED ITEMS. COORDINATE REQUIREMENTS WITH TENANT'S AV VENDOR. SE A8.01 FOR WALL BACKING INFORMATION.

4.ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDANT.

5. ALL RELITE GLASS TO BE TEMPERED.

6. SEE ROOM FINISH SCHEDULE ON SHEET A7.20 AND FINISH PLANS FOR LOCATION AND EXTENT OF FINISHES.

7. ALL DIMENSIONS SHOWN ARE TO FACE OF PARTITION, CENTERLINE OF COLUMN, OR FACE OF CONCRETE MASONRY UNLESS NOTED OTHERWISE.

8. PROVIDE BLACK CAULK AND SEALANT AT ALL BUTT-JOINTED GLAZING.

9. REFER TO SHEET A8.02 FOR DOOR SCHEDULE, DOOR TYPES AND DOOR HARDWARE.

10. EXISTING RESTROOM PLUMBING FIXTURES, LIGHT FIXTURES, TOILET ACCESSORIES AND FINISHES ARE TO REMAIN UNO.

11. PATCH AND REPAIR SITE EXPLORATION HOLES, OPENINGS IN WALLS.

GENERAL NOTES-FLOOR PLAN P23508

12" = 1'-0"

GENERAL NOTES:

1. PLAN DIMENSIONS ARE FROM GRIDLINE, EXTERIOR FACE OF SIP PANEL, F.O. CONCRETE, AND CENTERLINE OF SCL U.N.O.
2. SEE A6 SERIES SHEETS FOR SLAB EDGE DIMEMSIONS.
3. FOR PLAN ABBREVIATIONS SEE SHEET A0.01.
4. REFER TO LIFE SAFETY, LS1.0-LS2.02 SERIES SHEETS FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES.
5. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.

GENERAL NOTES - FLOOR PLAN - BP2 P21587

1/4" = 1'-0"

1. FOR PARTITION TYPES, SEE A8.01

2. FOR INTERIOR PARTITION DETAILS, SEE A8.02-A8.08

3. WALL TYPE IS FA 0|4, UNO

4. FOR AIR LEAKAGE CONTROL LOCATIONS, LEGEND, AND DETAILS, SEE OVERALL PLANS IN A2 FLOOR PLANS, LEGEND ON A2.03-TI, A8.07, AND A8.08

5. FOR BACKING PLATE SCHEDULE, SEE A8.02

6. FOR ABBREVIATIONS, SEE A0.10

7. FOR DOOR SCHEDULES, SEE A8.12 - A8.16

8. FOR MEDICAL EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES, SEE A12 EQUIPMENT PLANS

9. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES ON A8.21 - A8.25 AND A10 FINISH PLANS

10. FOR DIMENSION STANDARDS, SEE A0.10

11. VERIFY ROUGH-IN DIMENSIONS OF ALL EQUIPMENT WITH MANUFACTURER AND/OR WITH REUSED OR EXISTING EQUIPMENT.

12. PROVIDE P-LAM SOFFIT FILLER PANEL ABOVE ALL UPPER CABINET LOCATIONS. EXTEND TO CEILING, UNO

13. FOR P-TUBE STATION LOCATIONS AND DETAILS, SEE A2 FLOOR PLANS AND A8.90 - A8.91

14. FOR RADIATION PROTECTION LOCATIONS, SEE A2 FLOOR PLANS

15. REFERENCE BIPLANE VENDOR DRAWINGS FOR ELECTRICAL PULL BOXES AND DUCTS IN CATH LAB 1 FB.6.511, CATH LAB/EP2 FB.6.516, CONTROL/TEAM FB.6.513 AND EQUIPMENT FB.6.517

GENERAL NOTES - FLOOR PLAN S23683

12" = 1'-0"

GENERAL NOTES:

1. PLAN DIMENSIONS ARE FROM GRIDLINE, EXTERIOR FACE OF SIP PANEL, F.O. CONCRETE, AND FACE OF SCL U.N.O. 8
2. SEE A6 SERIES SHEETS FOR SLAB EDGE DIMEMSIONS.
3. FOR PLAN ABBREVIATIONS SEE SHEET A0.01.
4. REFER TO LIFE SAFETY, LS1.0-LS2.02 SERIES SHEETS FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES.
5. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.
6. SEE A8.01-A8.04 FOR PARTITION TYPES AND DETAILS.
7. TYPICAL WALL TYPES ARE: FA 0 4 U.N.O. .
8. WINDOWS INDICATED WITH 4'-0 3/4" R.O. PERMITS STANDARD 4' WINDOW WITDH AND 3/8" SHIM SPACE EACH SIDE. 8

GENERAL NOTES - FLOOR PLAN - BP3 P21587

1/4" = 1'-0"

1. REFER TO SHEET A8.00 FOR PARTITION TYPES.

2. ~~DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY OR FACE OF CONCRETE UNLESS OTHERWISE NOTED.~~

3. PARTITION TYPES IS FA 0 4 UNLESS OTHERWISE NOTED.

4. F.E.C. = FIRE EXTINGUISHER CABINET, 75' MAX TRAVEL DISTANCE BETWEEN FIRE EXTINGUISHERS.

5. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.

6. FOR SHEAR WALL LOCATIONS SEE STRUCTURAL.

7. FOR FURTHER PARTITION INFORMATION, SEE ENLARGED FLOOR PLANS.

8. SEE SHEET A8.01 FOR FIRE RATED DETAILS AT FLOORS, CEILINGS, ROOFS, AND PARTITIONS.

9. REFER TO ENLARGED PLANS FOR WALL TYPES AT TYPICAL LOCATIONS.

10. FURNITURE AND RESIDENTIAL APPLIANCES ARE OFOI AND SHOWN FOR REFERENCE ONLY. REFER TO FURNITURE AND EQUIPMENT PLANS.

11. SEE SHEET A2.02 FOR INTERIOR PARTITION INFORMATION NOT SHOWN OR REFERENCED HERE.

GENERAL NOTES - FLOOR PLANS P23241

1/4" = 1'-0"

1. DIMENSIONS ARE TO FACE OF FINISH UNLESS NOTED OTHERWISE.

2. PATCH, REPAIR AND PAINT EXISTING SURFACES IN AREA OF WORK, TYPICAL UNLESS NOTED OTHERWISE.

3. CONTRACTOR TO VERIFY ALL (E) WALL-MOUNTED DEVICES IN COMMON CORRIDORS INCLUDING ELECTRICAL FACE-PLATES, SWITCHES, THERMOSTATS, MISC ELECTRICAL, MISC FIRE-LIFE-SAFETY DEVICES. INSTALL (N) STAINLESS STEEL ELECTRICAL AND SWITCH FACE PLATES.

4. ALL RECEPTACLES SHALL BE INSTALLED AT ADA MINIMUM HEIGHT UNLESS NOTED OTHERWISE. REFER TO DETAIL 1/A7.01.

5. DEVICES ARE SHOWN FOR APPROXIMATE LOCATION ONLY UNLESS DIMENSIONED IN THE DRAWINGS. CONFIRM LOCATIONS BY SITE WALK WITH ARCHITECT AND OWNER PRIOR TO ROUGH-IN. REVISE OUTLET LOCATIONS NOT EXCEEDING 8 FEET FROM THOSE INDICATED AT NO ADDITIONAL COST.

6. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS, UNLESS NOTED OTHERWISE.

7. SEE INTERIOR ELEVATIONS FOR ADDITIONAL MATERIAL DESIGNATION.

8. ALL PAINTS / ADHESIVES SHALL BE LOW VOC.

9. PAINT P1 AT ALL GYPSUM WALLS, CEILINGS, GRILLES AND ACCESS PANELS TO REMAIN, UNLESS NOTED OTHERWISE.

10. REFER TO THE REFLECTED CEILING PLANS FOR CEILING DESIGNATIONS.

11. REFER TO INTERIOR ELEVATIONS FOR MILLWORK FINISHES AND ADDITIONAL BASE LOCATIONS.

12. ALL FLOOR FINISH TRANSITIONS TO COMPLY WITH ADA REQUIREMENTS.

13. VERIFY BUILDING STANDARD DOOR HARDWARE AT NEW DOORS. ALL DOOR HARDWARE IS TO INCLUDE BUILDING STANDARD HANDLES UNLESS OTHERWISE NOTED OR SPECIFIED. COORDINATE LOCKING REQUIREMENTS WITH BUILDING OWNER.

14. ALL WORK AND MATERIALS TO CONFORM TO BUILDING STANDARDS UNLESS OTHERWISE NOTED.

15. PROVIDE REINFORCEMENT IN PARTITIONS AS REQUIRED FOR ANCHORAGE OF CASEWORK, MILLWORK, AND OTHER SUPPORTED ITEMS. ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDANT.

16. SIGNAGE BY OWNER.

17. PAINT ALL INTERIOR CURTAINWALL MULLIONS AND ALL EXPOSED SURFACES P5.

18. FURNITURE IS SHOWN FOR POWER/ DATA COORDINATION AND IS FOR REFERENCE ONLY. FURNITURE IS OFOI.

19. VERIFY ALL MANUAL LOCKING, ELECTRIFIED LOCKING, KEYING, CARD READERS AND SECURITY MONITORING AT DEMOLISHED DOORS. CONFIRM SAME FUNCTIONALITY.

GENERAL NOTES - FLOOR PLAN P23628

1/4" = 1'-0"

1. PROVIDE FLOOR BOXES IN OPEN OFFICE, OPEN COLLABORATION, LOUNGE COLLABORATION, FAC CONTROL ROOM, AND ALL MEETING ROOMS FOR POWER AND DATA.
2. SEE SHEET A8.15 FOR ROOM FINISH SCHEDULE.
3. SEE SPECIFICATION SECTION 01 12 00 FOR FINISH LEGEND.
4. SEE ENLARGED PLANS FOR ADDITONAL NOTES, TAGS, AND DIMENSIONS.
5. SEE FLOOR FINISH PLANS FOR FLOOR FINISHES AND MATERIAL TRANSITIONS.
6. SEE REFLECTED CEILING PLANS FOR CEILING FINISHES, LIGHT FIXTURES AND DEVICES AND LOCATIONS.
7. PORTABLE ASSISTIVE LISTENING SYSTEM ACCOMMODATION WILL BE MADE ON AN AS REQUESTED BASIS, AS REQUIRED PER CBC-11B-216.10,

GENERAL NOTES - A2.02 P24785

12" = 1'-0"

1. FOR PARTITION TYPES, SEE A8.01
2. FOR INTERIOR PARTITION DETAILS, SEE A8.02-A8.08
3. WALL TYPE IS FA 0|4, UNO
4. FOR ABBREVIATIONS, SEE A0.10
5. FOR DOOR SCHEDULES, SEE A8.12
6. FOR EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES, SEE A12 EQUIPMENT PLANS
7. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES IN A8.25, AND A10 FINISH PLANS
8. FOR DIMENSION STANDARDS, SEE A0.10
9. VERIFY ROUGH-IN DIMENSIONS OF ALL EQUIPMENT WITH MANUFACTURER AND/OR WITH REUSED OR EXISTING EQUPMENT.
10. PROVIDE P-LAM SOFFIT FILLER PANEL ABOVE ALL UPPER CABINET LOCATIONS. EXTEND TO CEILING, UNO

GENERAL NOTES - FLOOR PLAN (RIVER) S23683

12" = 1'-0"

GENERAL NOTES:

1. SEE SHEET TI8.01 FOR PARTITION TYPE INFORMATION
2. SEE SHEET TI8.02 FOR TYPICAL PARTITION DETAILS
3. SEE SHEET TI8.03 FOR ACCESSIBILITY DIAGRAMS

PLAN NOTES - FLOORS 1-4 S21458

12" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO BE TO FINISHED FACE OF PARTITION U.N.O.
2. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO BRING TO THE ATTENTION OF THE ARCHITECT ANY FIELD CONDITIONS THAT DO NOT ALLOW CONSTRUCTION OR INSTALLATION AS SHOWN.
3. DO NOT SCALE DRAWINGS. DIMENSIONS AS INDICATED TAKE PRECEDENT.
4. REPAIR ALL EXISTING BASE BUILDING PARTITIONS, DOORS, FRAMES, ETC. THAT ARE TO RECEIVE A NEW FINISH. G.C. TO TOUCH UP ALL EXISTING SUITE PARTITIONS, DOORS, FRAMES, MILLWORK, ETC. TO REMAIN AS REQUIRED TO APPEAR AS NEW. G.C. TO BRING TO THE ATTENTION OF THE ARCHITECT, ANY AREAS REQUIRING MAJOR REPAIR THAT CANNOT BE DONE WITH TOUCH UP ONLY, SO IT CAN BE PRICED ACCORDINGLY.
5. REFER TO LIFE SAFETY, T2.00 SERIES SHEETS FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES.
6. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.
7. DIMENSIONS BETWEEN/FROM EXISTING GRIDLINES, EXTERIOR ENCLOSURE, INTERIOR PARTITIONS, ETC. TO BE VERIFIED IN FIELD.

zgf - General Notes_Floor Plan L23723

1/8" = 1'-0"

1. REFER TO SHEET A0.02 FOR DIMENSIONING STANDARDS & ADDITIONAL GENERAL NOTES.
2. DOOR LOCATIONS ARE PER SHEET A8.51 & A8.52 UNLESS OTHERWISE NOTED IN PLAN.
3. REFER TO LIFE SAFETY DRAWINGS (LS1.# SERIES SHEETS) FOR LOCATION & EXTENT OF ALL FIRE RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS & OTHER LIFE SAFETY REQUIREMENTS.
4. REFER TO ENLARGED STAIR & ELEVATOR PLANS & SECTIONS (A5.# SERIES SHEETS) FOR ADDITIONAL INFORMATION.
5. REFER TO ENLARGED TOILET PLANS (A6.# SERIES SHEETS) FOR ADD. DIMS, & REFERENCE TO INTERIOR ELEVATIONS.
6. COORDINATE OPENINGS IN WALLS WITH MECHANICAL, PLUMBING & ELECTRICAL DRAWINGS.
7. REFER TO SHEET A8.01 FOR INTERIOR WALL PARTITION INFORMATION.
8. PROVIDE WALL BACKING TO SUPPORT HANDRAILS & MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS.
9. PROVIDE FIRE TREATED PLYWOOD AT TELECOM (TC) ROOMS & ELECTRICAL ROOMS.
10. SEE VERTICAL TRANSPORTATION (VT.# SERIES SHEETS) FOR ELEVATOR INFORMATION.
11. EXTERIOR ASSEMBLIES PER SHEETS A0.11 & A0.12.
12. SEE DETAIL 18/S3.01 FOR TYPICAL BOLLARD DETAIL.
13. SEE S2.2* SERIES FOR LOCATION OF SEISMIC JOINTS & CORRESPONDING DETAIL CALLOUTS.
14. PROVIDE WHEEL STOPS IN FRONT OF PRECAST GRAVITY CONNECTIONS. LOCATIONS TO BE DETERMINED WHEN PRECAST CONNECTION POINTS ARE DEFINED.
15. ALL EXPOSED CONCRETE COLUMNS IN OFFICE LEVELS TO BE ARCHITECTURALLY FINISHED, U.N.O.
16. ALL EXPOSED EXTERIOR COLUMNS TO BE ARCHITECTURALLY FINISHED.
17. PROVIDE SA-02 UNDER CONDITIONED SPACES. EXTEND 4'-0" BEYOND BOUNDARY.
18. REFER TO SHEET A4.62 FOR PIPE PROTECTION DETAILS.

GENERAL NOTES - FLOOR PLANS S22646

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE **(FA)**.

2. **PARTITIONS ARE CENTERED ON BUILDING PLANNING MODULE UNLESS DIMENSIONED OR NOTED.**

3. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

4. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - FLOOR PLAN S26231

12" = 1'-0"

1. ALL DIMENSIONS ARE TO FINISHED FACE OF PARTITION, UNLESS NOTED OTHERWISE.

2. PROVIDE REINFORCEMENT IN PARTITIONS AS REQUIRED FOR ANCHORAGE OF CASEWORK AND ANY WALL SUPPORTED EQUIPMENT AND/OR ACCESSORIES. VERIFY WITH PRODUCT SPECIFICATIONS.

3. REPLACE ALL DAMAGED WINDOW FILM.

4. PROVIDE ANCHORING FOR WALL MOUNTED SINKS AND GRAB BARS TO WITHSTAND A 250 LB APPLIED VERTICAL LOAD ON THE FRONT EDGE OF THE FIXTURE. ANCHORING IS TO BE PROVIDED WITH FLOOR MOUNTED CONCEALED ARMS. SEE ***A8.XX*** FOR LAVATORY SUPPORTS AND BACKING AT GRAB BARS.

5. CONTRACTOR TO COORDINATE SIGNAGE INSTALLATION WITH SCH CONTRACTED SIGN VENDOR.

6. CONTRACTOR TO PROVIDE ACCESSORIES LISTED IN ACCESSORY SCHEDULE ON SHEET ***A8.01***.

7. REFER TO A7 SERIES FOR ELEVATIONS.

8. REFER TO MECHANICAL AND ELECRICAL DRAWINGS FOR ADDITIONAL INFORMATION.

FLOOR PLAN GENERAL NOTES S26200

1/4" = 1'-0"

GENERAL NOTES

1. VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK.
2. REFER TO SHEET G0.01.A FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, & DIMENSIONAL STANDARDS
3. REFER TO LIFE SAFETY LS* SERIES DRAWINGS IN PACKAGE A FOR LOCATION & EXTENT OF ALL RATED ASSEMBLIES
4. REFER TO SLAB EDGE DRAWINGS FOR DIMENSIONS OF SLAB EDGES, CURBS, EQUIPMENT/HOUSEKEEPING PADS, AND OPENINGS.
5. REFER TO A3.21.D FOR EXTERIOR PARTITIONS AND MATERIAL SCHEDULE
6. REFER TO A5* AND A6* SERIES FOR PARTITION TYPES
7. REFER TO A7.01.D FOR TYPICAL WALL FRAMING AND BLOCKING DETAILS
8. REFER TO A8* SERIES FOR PARTITION SCHEDULE AND DOOR SCHEDULE & DETAILS
9. REFER TO A8.04.D FOR GENERAL WALL FRAMING AND BLOCKING DETAILS.
10. PARKING LEVEL & PHASE 1 PLANS ARE ISSUED UNDER SEPARATE COVER
11. SEE ELEVATIONS FOR EXTERIOR ASSEMBLY TYPES
12. REFER TO PACKAGE D DRAWINGS FOR TYPICAL ROOF DETAILS

LEGEND:

EXISTING

NEW

FALL ARREST ANCHOR

PROPERTY LINE

FLOOR PLANS GENERAL NOTES PHASE 2 D24085

1/16" = 1'-0"

1. REFER TO A8.01 FOR PARTITION TYPES, DIMENSION NOTES , DOOR SCHEDULE , FINISHES

2. FOR ALL 32 PATIENT ROOMS AND PATIENT ROOM TOILETS), SEE ROOMS FA.4.221 AND FA.4.222 FOR TYPICAL INFORMATION.

3. REFER TO A12 SERIES EQUIPMENT PLANS, FOR MEDICAL EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES.

4. REFER A8 SERIES FOR FINISH SCHEDULE

5. REFER A7 SERIES FOR ELEVATIONS AND FINISHES U.N.O

6. REFER ELECTRICAL AND MECHANICAL DRAWINGS FOR ADDTIONAL INFORMATION

FLOOR PLAN, GENERAL NOTES S23381

12" = 1'-0"

1. SEE ENLARGED FLOOR PLANS ON **A6 SERIES** FOR ADDITIONAL DIMENSIONING AND PARTITION TYPES.

2. SEE **A8.11** FOR DOOR AND FRAME TYPES AND SCHEDULE.

3. SEE **A9 SERIES** FOR REFLECTED CEILING PLANS.

4. SEE **A8.21** FOR FINISH SCHEDULE AND **A10.01** FOR FINISH PLAN.

5. CONTRACTOR TO FIELD-VERIFY ALL EXISTING PENETRATIONS RELATIVE TO NEW CONSTRUCTION, TYP.

GENERAL NOTES - OVERALL FLOOR PLAN S24168

1/4" = 1'-0"

GENERAL NOTES:

1. REFER TO A8.01 FOR PARTITION TYPES.

2. SEE SHEET A8.01 FOR DIMENSION NOTES.

3.REFER TO A8.14 FOR DOOR SCHEDULES.

4.REFER TO EQUIPMENT PLANS, A6 SERIES FOR MEDICAL EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES.

5. NOT USED

6. FOR SECTOR 2 PATIENT ROOMS WITH ADA AND BARIATRIC PATIENT TOILETS (LEVEL 3), SEE ROOM FA.3.315 AND FA.3.316 FOR TYPICAL INFORMATION.

7. FOR SECTOR 3 PATIENT ROOMS WITH ADA AND BARIATRIC PATIENT ROOM TOILETS (LEVEL 3), SEE ROOMS FA.3.215 AND FA.3.216 FOR TYPICAL INFORMATION.

8. FOR ALL OTHER PATIENT ROOMS AND PATIENT ROOM TOILETS (LEVEL 3), SEE ROOMS FA.3.201 AND FA.3.202 FOR TYPICALINFORMATION.

11. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES AND A10 SERIES DRAWINGS.

12. PATIENT ROOM NAME SUFFIX (IN PARENTHESES) REFERS TO MECHANICAL ENVIRONMENT REQUIREMENT IN THE ROOM:

PE PROTECTIVE ENVIRONMENT (POSITIVE PRESSURE)

AII AIRBORNE INFECTION ISOLATION (NEGATIVE PRESSURE)

13. VERIFY CLEARANCES FOR EQUIPMENT. REFER TO EQUIPMENT PLAN FOR EQUIPMENT IDENTIFICATION.

14. PATCH AND REPAIR EXISTING FIREPROOFING AS REQUIRED FOR RATED WALLS AND STRUCTURE.

15. PATCH AND REPAIR ANY FLOOR PENETRATIONS TO MAINTAIN CURRENT FLOOR RATING.

EXISTING AREAS HATCHED GREY

GENERAL NOTES, PLAN LEVEL 3 S22324

12" = 1'-0"

SHEET NOTES

1. FOR DIMENSIONAL LOCATIONS OF ALL CONCRETE SHEAR WALLS, CURBS, FLOOR DRAINS AND SLAB ELEVATION HEIGHTS, REFER TO "EDGE OF SLAB" SHEETS.
2. FOR ADDITIONAL DIMENSIONS AND INTERIOR WALL ELEVATION REFERENCE KEYS, SEE ENLARGED PLANS AS REFERENCED IN PLAN.
3. FOR SYMBOL LEGEND AND ABBREVIATIONS, SEE SHEET G1.01.
4. REFER TO SHEET G1.08 FOR TYPICAL MOUNTING HEIGHTS OF ITEMS NOT DIMENSIONED ON INTERIOR ELEVATIONS.
5. FOR ADDITIONAL PARTITION DETAILS AND INFORMATION, REFER TO SHEETS A8.01 AND A8.02 FOR PARTITION SCHEDULE AND TYPICAL PARTITION TYPES AND DETAILS.
6. FOR ADDITIONAL INFORMATION REGARDING METAL BACKING REQUIRED AT PARTITIONS, REFER TO GENERAL NOTES # 14 ON SHEET A8.01 AND TO DETAILS ON SHEET A8.05.
7. ALL PARTITIONS ARE FA 014 TYPE UNLESS IDENTIFIED OTHERWISE ON PLANS.
8. SEE SHEETS A8.06 & A8.07 FOR SPECIFIC COLUMN ENCLOSURE DETAILS.

CASEWORK NOTES / LEGEND

GENERAL NOTES:

1. REFER TO SPECIFICATION SECTION 06402 FOR CASEWORK TYPES AND SPECIFICATIONS.
2. CASEWORK SHALL BE OF WIC "CUSTOM GRADE" THROUGHOUT, U.N.O.; CASEWORK IN CAFE AND LECTURE HALL SHALL BE OF WIC "PREMIUM GRADE".
3. REFER TO SHEETS A8.20 - A8.23 FOR FINISH SCHEDULES.
4. FOR ADDITIONAL INFORMATION, REFER TO ELEVATIONS AS NOTED ON THE PLANS.

CASEWORK

SYMBOLS LEGEND

FEC — SEMI-RECESSED FIRE EXTINGUISHER CABINET, SEE 18/A8.04 FOR DETAIL

F — SURFACE-MTD FIRE EXTINGUISHER

E — ACCESS COMPLIANCE AREAS AT DOORS
48" X 48" AT PUSH SIDE AT 3'-0" DOORS,
54" X 60" AT PULL SIDE AT 3'-0" DOORS
54" X 48" AT PUSH SIDE AT 3'-6" DOORS,
60" X 60" AT PULL SIDE AT 3'-6" DOORS

MRI PHASE II BUILD-OUT

FLOOR PLAN SHEET NOTES L40364

1/8" = 1'-0"

1. SEE SHEET A0.002 FOR SYMBOL LEGEND AND ABBREVIATIONS.
2. SEE SHEET A0.011 FOR LOCATIONS OF FIRE RATED ASSEMBLIES.
3. SEE SHEET A8.102 FOR OPENING SCHEDULE.
4. SEE SHEET A8.001 FOR PARTITION SCHEDULE.
5. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.
6. SEE SHEET A8.101 FOR DIMENSIONS OF DOOR TO WALL, UNLESS NOTED OTHERWISE.
7. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
8. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS ARE C/A/2 UNO.
9. SEE STRUCTURAL FOR CEILING HUNG TOILET PARTITION SUPPORT

GENERAL NOTES, FLOOR PLAN, OVERALL (PH 1) S24925

12" = 1'-0"

OF ALL SIP WALLS FOR THERMAL BARRIER PER IBC CHAPTER 26 03.4

TION AT EXTERIOR WALL AND SOFFIT ASSEMBLIES
T OF ALL FIRE RATED ASSEMBLIES
DDITIONAL OPENINGS IN WALLS.
STALLED WITH MANUALLY OPERATED ROLLER SHADES
ISIONS AND WORK POINTS.
TY, ARE SHOWN FOR COORDINATION WITH FINISHES. SEE STRUCTURAL FOR SHEAR & BEARING WALL INFORMATION
L TAG (* OR ** SEE A8.10)
TIONS.

GENERAL NOTES - PLAN P21964

12" = 1'-0"

1.WALL TYPE TO BE TYPE QA|0|3 UNO. SEE WALL TYPES SHEET A8.00.

2.FURRING WALLS TO BE TYPE B|A|3 UNO. SEE WALL TYPES SHEET A8.00.

3. TYPICAL COLUMN FURRING DETAILS ON A8.51. ATYPICAL CONDITIONS DIMENSIONED/REFERENCED IN PLAN.

4. ALL DOOR OPENINGS TO BE LOCATED 4" FROM ADJACENT WALL, U.N.O.

5. FOR SLAB OPENINGS, SEE SLAB PLANS FOR CLEAR DIMENSIONS.

6. FOR TYPICAL TOILET ACCESSORIES SEE TYPICAL MOUNTING SHEET A7.00.

7.FOR EQUIPMENT/ACCESSORY MOUNTING HEIGHTS, SEE TYPICAL MOUNTING SHEET A7.00.

8. FOR ANY FLOOR BOX LOCATIONS, COORDINATE WITH FURNITURE. SEE SLAB PLAN FOR DIMENSIONS.

9. WHERE SHOWN, WALLS TO ALIGN WITH EXT. WALL ELEMENTS

10. CENTER WALL ENDS ON CURTAIN WALL MULLIONS WHERE SHOWN, SEE DETAIL 8/ A8.50 FOR TYPICAL CONDITION. SEE REFERENCED DETAIL FOR ATYPICAL CONDITIONS.

ABBREVIATIONS

WB	WHITE BOARD
PB	PEGBOARD
WLP	WALL PROTECTION
CG	CORNER GUARD
CR	CRASH RAIL
EW	EYEWASH
AP	ACCESS PANEL
SPT	SPECIMEN PASS-THRU
CJ	CONTROL JOINT

DOOR ITEMS:

CR	CARD READER
TA	TOUCHLESS ACTUATOR

ELEVATOR ITEMS:

EC	ELEVATOR CALL BUTTON(S) (BY MANUF)
CP	COMPASS PANEL (BY MANUF)
KP	KEYPAD (BY MANUF)

GENERAL NOTES - PLANS P22681

12" = 1'-0"

1. REF. TO A5 SERIES FOR STAIRS ENLARGED PLANS AND SECTIONS
2. REF. TO A6 SERIES FOR RESTROOMS ENLARGED PLANS
3. REF. TO A6 SERIES FOR BREAK AREA ENLARGED PLANS AND ELEVATIONS
4. REF. TO A10 SERIES FOR FLOOR FINISHES.
5. PROVIDE MINIMUM 16 GA. FRAMING MEMBERS FOR ALL VIVARIUM PARTITIONS. SEE SPECIFICATIONS FOR REQUIREMENTS.
6. REFER TO LAB EQUIPMENT DRAWINGS FOR SPECIALIZED EQUIPMENT AND LAYOUTS.
7. BLOCKING REQUIRED AT ALL LAB WALL MOUNTED SHELVING AND WALL BRACKETS FOR COUNTER SUPPORT. REFER TO LAB DRAWINGS FOR LOCATIONS. ALL REQUIRED VIVARIUM BLOCKING TO BE SHEET METAL.
8. PROVIDE BLOCKING AT OFFICES (2 WALLS).
9. ALL FURNITURE IS EXCLUDED FROM CONTRACT SCOPE.
10. REF. TO DETAIL 6/ A8.43 FOR GRG ROUND COLUMN COVERS. COLUMN COVERS ARE TYPE B U.N.O.
11. REF. TO A8.42 FOR ALL BREAKROOM BACKSPLASH DESIGNS PER FLOOR
12. PROVIDE REQUIRED BLOCKING FOR ALL EQUIPMENT
13. PAINT ALL WALLS P1, UNO.

GENERAL NOTES - PLANS D25258

12" = 1'-0"

ITY INFORMATION.
ATION.

UPPLIED BY OWNER. CONTRACTOR

E 8/G1.000.

S INDICATED TO BE SHOWN ON PLAN.

PARTITION TAGS

**SEE PARTITION SCHEDULE, A8.001, A8.002, & A8.004 FOR PARTITION ASSEMBLY TYPES*

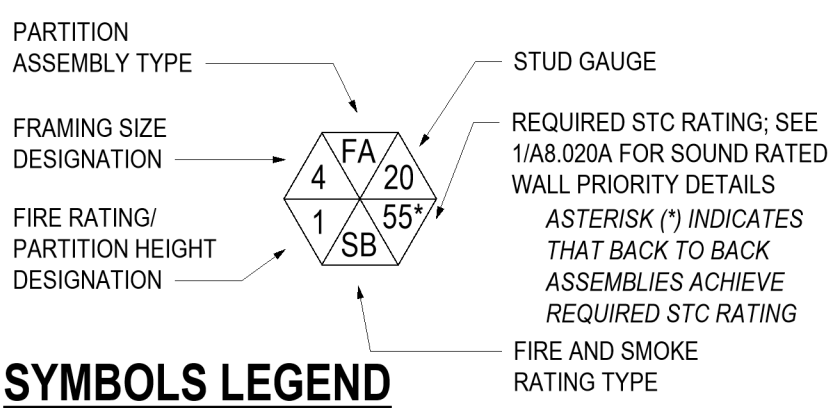

SYMBOLS LEGEND

- FLOOR BOX.
- MEDICAL EMERGENCY SERVICE ELEVATOR
- GRAPHIC INDICATION FOR CASEWORK
- EXPANSION JOINT
- EXPANSION JOINT COVER
- CJ — CONTROL JOINT

FIRE & SMOKE RATING TYPES

**SEE DETAILS 1/A8.010B, 2/A8.010B, & 3/A8010B FOR RECESSED EQUIPMENT IN PARTITIONS*

- NO RATING DESIGNATION
- 1 HR FIRE BARRIER (FB)
- 1 HR FIRE PARTITION (FP)
- 1 HR FIRE & SMOKE BARRIER (FS)
- 2 HR FIRE BARRIER (FB)
- 2 HR FIRE @ SMOKE BARRIER (FS)

FIRE PROTECTION EQUIPMENT

- FE — SURFACE MOUNTED FIRE EXTINGUISHER
- FE_{4-A} — SURFACE MOUNTED FIRE EXTINGUISHER (4-A:20-B:C)
- FE-K — SURFACE MOUNTED FIRE EXTINGUISHER (TYPE K)
- FEC_{R} — RECESSED FIRE EXTINGUISHER CABINET
- FEC_{SR} — SEMI-RECESSED FIRE EXINGUISHER CABINET
- HVC_{S} — SURFACE MOUNTED HOSE VALVE CABINET
- HVC_{SR} — SEMI-RECESSED HOSE VALVE CABINET

GENERAL NOTES - PLANS, A2 SECTOR 1/8" L24793

12" = 1'-0"

1. SEE SHEET A8.01 FOR PARTITION TYPE SCHEDULE.
2. REFER TO BASE BUILDING DOCUMENTS FOR WALLS TAGGED "NOTE", GYPSUM BOARD FINISH ALREADY PROVIDED BY BASE BUILDING.
3. NON RATED PARTITIONS TYPE F/A/4 UNLESS OTHERWISE NOTED.
4. PARTITIONS SHALL BE FINISHED TO A MINIMUM OF LEVEL 4 AND PAINTED, SEE FINISH SCHEDULE.
5. STUDS TO STRUCTURE AT PARTITIONS AS REQUIRED FOR BRACING.
6. PROVIDE BACKING AT ALL WALL FOR CEILING MOUNTED EQUIPMENT INCLUDING AT AV WALLS FOR FLAT SCREENS, WALL MOUNTED AND FULL HEIGHT CASEWORK, AND WHERE SHOWN ON ELEVATIONS. SEE A8.00 SHEETS FOR ADDITIONAL INFORMATION.
7. ANCHOR ALL CASEWORK TO FLOOR WHERE LOCATED NEXT TO PARTIAL HEIGHT PARTITIONS.
8. SEE SHEET A10.01 FOR FLOOR FINISH PLANS
9. PROVIDE PUTTY PADS AT ALL OUTLETS, JUNCTION BOXES, SWITCHES. SIZE ALL PENETRATIONS AT SOUND RATED WALLS SO THERE IS NO DIRECT CONTACT WITH STRUCTURE AND SEAL AIRTIGHT WITH ACOUSTICAL SEALANT BOTH SIDES OF PENETRATION. REFER TO WALL TYPE DESIGNATION FOR LOCATIONS.
10. FURNITURE SHOWN FOR INFORMATION ONLY.
11. DIMENSIONS ARE FOR REFERENCE ONLY. CONTRACTOR TO VERIFY ALL DIMENSIONS.
12. DIMENSIONS TAKEN FROM GRID CENTERLINE TO FACE OF FINISH UNLESS OTHERWISE NOTED.
13. ALL WOOD BLOCKING, NAILERS, ETC. TO BE FIRE RETARDANT.
14. EQUIPMENT IS SHOWN FOR REFERENCE ONLY AND IS NOT INCLUDED IN CONTRACT. SEE SHEET A10.02 FOR INFORMATION.
15. SEE PLUMBING DRAWINGS AND A8.07 FOR FLOOR DRAIN DETAIL IN DIAPER/TOILET ROOMS 1 AND 2.
3 16. FINAL ROOM NUMBERS TO BE DETERMINED BY OWNER. CONFIRM WITH ARCHITECT, SIGNAGE CONSULTANT AND OWNER.

GENERAL NOTES - PLANS P23198

12" = 1'-0"

STALLATION WHETHER OR NOT

OVERN. WHERE WRITTEN

ERNED, CONTACT THE ARCHITECT

AILS.

ED FOR ANCHORAGE OF
ITEMS.

EXTENTS OF FINISHES.

OINTED GLAZING.

OOR TYPES.

S AT SOLID SURFACE LOCATIONS

PICAL UNLESS OTHERWISE

NTERIOR TILE FINISH-

VITY UNLESS OTHERWISE

13. PROVIDE ACOUSTIC SEAL AT PERIMETER AND PENETRATIONS OF SOUND RATED PARTITIONS AND OTHER CONSTRUCTION AS REQUIRED TO ACHIEVE STC INDICATED.

14. PLAN DIMENSIONS ARE TO FACE OF PARTITION ASSEMBLY, CENTERLINE OF COLUMN, OR FACE OF CONCRETE MASONRY UNLESS OTHERWISE NOTED.

15. REFER TO SPECIFICATION FOR INFORMATION REGARDING FINISHES.

FLOOR PLAN GENERAL NOTES P22179

1/4" = 1'-0"

LEGEND:

—— SOLID ELEMENTS CF/CI (CONTRACTOR FURNISHED, CONTRACTOR INSTALLED)

- - - - DASHED ELEMENTS OF/CI (OWNER FURNISHED, CONTRACTOR INSTALLED

—— HALF TONED ELEMENTS EXISTING TO REMAIN

NOTE(S):

1. PROTECT EXISTING BUILDING ELEMENTS THAT ARE BEING REUSED.
2. PROTECT EXISTING BUILDING ELEMENTS FROM STAINING THAT ARE TO BE EXPOSED, SUCH AS CONC. MTL, AND BRICK.
3. DOOR LOCATIONS ARE PER SHEET A9.005 UNLESS OTHERWISE NOTED IN PLAN.
4. REFER TO LIFE SAFETY DRAWINGS FOR LOCATION AND EXTENT OF ALL FIRE RATED ASSEMBLIES, FIRE EXTINGUISHER LOCATIONS, EXIT SIGNS, TRAVEL DISTANCES, EXIT LOCATIONS, OCCUPANCY LOADS & OTHER LIFE SAFETY REQUIREMENTS.
5. REFER TO ENLARGED PLANS FOR ADDITIONAL INFORMATION.
6. COORDINATE OPENINGS THROUGH WALLS.
7. COORDINATE ALL DEVICES ON WALLS.
8. REFER TO SHEET A9.001 FOR INTERIOR WALL PARTITION INFORMATION.
9. PROVIDE WALL BACKING TO SUPPORT HANDRAILS & MISCELLANEOUS EQUIPMENT MOUNTED ON STUD WALLS.
10. PROVIDE FIRE TREATED PLYWOOD AT TELECOM (TC) ROOMS, ELECTRICAL, AND RADIO ROOMS.
11. SEE VERTICAL TRANSPORTATION (A7.000 SERIES SHEETS) FOR ELEVATOR INFORMATION.
12. EXTERIOR ASSEMBLIES PER SHEETS A8.000 SERIES.
13. SEE A6 SERIES SHEETS FOR CEILING INFORMATION.
14. SEE A2.600 AND A2.700 SERIES SHEETS FOR FLOOR AND OTHER FINISH INFORMATION.
15. REFER TO OTHER DISCIPLINES FOR EXTENT OF WORK IN THEIR SCOPE

GENERAL NOTES - PLANS 1/16" P99973

1/16" = 1'-0"

1. SEE SHEET A8.15 FOR ROOM FINISH SCHEDULE.
2. SEE SPECIFICATION SECTION 01 12 00 FOR FINISH LEGEND.
3. SEE ENLARGED PLANS FOR ADDITONAL NOTES, TAGS, AND DIMENSIONS.
4. SEE FLOOR FINISH PLANS FOR FLOOR FINISHES AND MATERIAL TRANSITIONS.
5. SEE REFLECTED CEILING PLANS FOR CEILING FINISHES, LIGHT FIXTURES AND DEVICES.
6. PORTABLE ASSISTIVE LISTENING SYSTEM ACCOMMODATION WILL BE MADE ON AN AS REQUESTED BASIS, AS REQUIRED PER CBC-11B-216.10,

GENERAL NOTES - A2.01 P24785

12" = 1'-0"

GENERAL NOTES:

1. REFER TO A8.01 FOR PARTITION TYPES.

2. SEE SHEET A-8.01 FOR DIMENSION NOTES.

3.REFER TO A-8.08 AND A8.09 FOR DOOR SCHEDULES.

4.REFER TO EQUIPMENT PLANS, A6 SERIES FOR MEDICAL EQUIPMENT PLACEMENT AND REQUIRED CLEARANCES.

5. NOT USED

6. FOR END UNIT ICU PATIENT ROOMS WITH ADA PATIENT TOILETS (LEVEL 4), SEE ROOM FA.5.216 AND FA.5.215 FOR TYPICAL INFORMATION.

7. FOR END UNIT PATIENT ROOMS WITH ADA PATIENT ROOM TOILETS (LEVELS 4 AND 5), SEE ROOMS FA.4.216 AND FA.4.215 FOR TYPICALINFORMATION.

8. FOR ALL OTHER PATITENT ROOMS AND PATIENT ROOM TOILETS (LEVELS 4 AND 5), SEE ROOMS FA.4.201 AND FA.4.202 FOR TYPICALINFORMATION.

11. FOR WALL AND FLOOR FINISH INFORMATION, SEE FINISH SCHEDULES AND A10 SERIES DRAWINGS.

12. PATIENT ROOM NAME SUFFIX (IN PARENTHESES) REFERS TO MECHANICAL ENVIRONMENT REQUIREMENT IN THE ROOM:

PE PROTECTIVE ENVIRONMENT (POSITIVE PRESSURE)

AII AIRBORNE INFECTION ISOLATION (NEGATIVE PRESSURE)

13. VERIFY CLEARANCES FOR EQUIPMENT. REFER TO EQUIPMENT PLAN FOR EQUIPMENT IDENTIFICATION.

14. PATCH AND REPAIR EXISTING FIREPROOFING AS REQUIRED FOR RATED WALLS AND STRUCTURE.

15. PATCH AND REPAIR ANY FLOOR PENETRATIONS TO MAINTAIN CURRENT FLOOR RATING.

EXISTING AREAS HATCHED GREY

GENERAL NOTES, PLAN S22324

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, PARTITIONS ARE TO BE TYPE FA/B3

2. FOR PARTITION TYPES, SEE A8.01.

3. FOR TYPICAL INTERIOR FRAMING DETAILS, HEADER AND JAMB SCHEDULE, SEE A8.01 & A8.02.

4. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

5. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS. FOR WALL BACKING PLATE DETAILS, SEE A8.02.

6. FOR DOOR SCHEDULE, SEE A8.03.

7. FOR FLOOR AND WALL FINISH, SEE A10.03.

8. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

9. PROVIDE SOLID SURFACE SINKS AS INDICATED. FOR ALL OTHER SINKS, FAUCETS, AND ACCESSORIES, SEE PLUMBING.

10. REPLACE GYPSUM BOARD WHERE REMOVED AT EXTERIOR WALLS.

11. ALL EXTERIOR WALLS TO RECIEVE (1) LAYER 5/8" GYPSUM BOARD. EXTEND FULL HEIGHT, STRUCTURE-TO-STRUCTURE, TO MATCH EXISTING.

GENERAL NOTES - FLOOR PLAN S25176

12" = 1'-0"

1. ALL DIMENSIONS ARE TO FINISHED FACE OF PARTITION, UNLESS NOTED OTHERWISE.

2. SEE PARTITION SCHEDULE ON SHEET A8.01 FOR PARTITION TYPES.

3. REFER TO THE PROJECT MANUAL APPENDIX FOR THE BELIMED INSTALLATION DRAWINGS: (2) STERILIZERS, (2) WASHERS, AND (1) ULTRASONIC CLEANER.

FLOOR PLAN GENERAL NOTES S24570

1/4" = 1'-0"

LEGEND:

- EXISTING TO REMAIN
- NEW
- EXPANSION JOINT
- PROPERTY LINE
- TRAFFIC COATING
- DIRECTIONAL ARROW TRAFFIC DECAL, TYP.

GENERAL NOTES - PARKING:

1. VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK.
2. REFER TO SHEET G0.01.C FOR LIST OF SYMBOLS, MATERIAL INDICATIONS, ABBREVIATIONS, & DIMENSIONAL STANDARDS
3. REFER TO LIFE SAFETY LS* SERIES DRAWINGS IN PACKAGE A FOR LOCATION & EXTENT OF ALL RATED ASSEMBLIES
4. REFER TO A8* SERIES OF PACKAGE A FOR PARTITION SCHEDULE & DETAILS.
5. SEE ELEVATIONS FOR EXTERIOR ASSEMBLY TYPES NOT NOTED IN PLAN.
6. UNO, ALL PARTITIONS ARE: M 0 8
7. REFER TO A5* SERIES DRAWINGS FOR STAIRS & ELEVATORS
8. WHERE PORTIONS OF PLANS ARE ENLARGED, SEE A6* SERIES DRAWINGS. PARTITIONS WITHIN ENLARGED PLANS ARE ANNOTATED WITHIN THE ENLARGED PLAN.

FLOOR PLANS GENERAL NOTES - PARKING D24085

1/16" = 1'-0"

RWISE NOTED

OR PARTITION TYPES AND DETAILS.

O MORE THAN .25 AND A SMOKE
OF THE SEATTLE BUILDING CODE.

PARTITION, UNLESS NOTED OTHERWISE.

ANCHORAGE OF CASEWORK AND ANY
FY WITH PRODUCT SPECIFICATIONS.

BARS TO WITHSTAND A 250 LB APPLIED
HORING IS TO BE PROVIDED WITH FLOOR
PPORTS AND BACKING AT GRABBARS.

GE INSTALLATION WITH SCCA

VALL BASE AT ALL EXTERIOR CORNERS IN
HEET A6.01 FOR LOCATIONS.

9. CONFIRM NEED FOR BACKING FOR WALL MOUNTED COMPUTER ARMS. EXACT LOCATION TO BE DETERMINED DURING ELECTRICAL ROUGH-IN WALK THROUGH.

10. OBTAIN FURNITURE PLAN FROM [TBD] PRIOR TO INSTALLATION OF SURFACE MOUNT BRACKET SUPPORT FOR WORK SURFACES. COORDINATE LOCATIONS WITH PLACEMENT OF CHAIRS AND FILE DRAWERS.

11. GYPSUM BOARD PARTITIONS IN EXISTING CORRIDOR ARE TO RECEIVE NEW PAINT, BASE, FLOORING AND CEILING AS SCHEDULED.

12. UNLESS NOTED OTHERWISE, NEW INTERIOR WALL TO FALL AT CENTERLINE OF EXISTING EXTERIOR WALLS AND WINDOW MULLIONS.

13. CONTRACTOR TO COORDINATE FURNISHING (ART, FURNITURE, SIGNAGE) INSTALLATION WITH SCCA CONTRACTED VENDOR.

14. CONTRACTOR TO VERIFY ALL EXISTING PENETRATIONS RELATIVE TO NEW CONSTRUCTION. CONFIRM WITH ARCHITECT ANY IDENTIFIED VARIANCES REQUIRED IN ORDER TO MAINTAIN REQUIRED CLEARANCES.

GENERAL NOTES - FLOOR PLAN S24168

1/4" = 1'-0"

1. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

2. ALL NEW/UPDATED SIGNAGE TO BE OWNER FURNISHED/OWNER INSTALLED.

GENERAL NOTES - FLOOR PLAN S26306

12" = 1'-0"

1. PROVIDE BACKING FOR ALL CASEWORK CABINETS, SHELVING, AND WALL-MOUNTED EQUIPMENT.
2. FURNITURE IS OFOI AND SHOWN FOR REFERENCE ONLY.
3. REFER TO SHEET A8.16 FOR EQUIPMENT SCHEDULE.
4. REFER TO SHEETS A2.16A & A2.16B FOR ALL PARTITION DIMENSIONS & DESIGNATIONS NOT SHOWN HERE.

GENERAL NOTES - FLOOR PLANS P24219

1/4" = 1'-0"

SHEET NOTES, FLOOR PLAN, AREA A

1. PROVIDE AUTO DOOR OPERATOR AND ACTUATORS AND PROVIDE ELECTRICAL CONNECTION TO HARDWARE. SEE A0.2. FOR MORE INFORMATION.

2. PROVIDE COPPER WATER LINE TO AND SHUT OFF VALVE AT TENANT PROVIDED WATER COOLER.
PRODUCT: DS WATERS, HOT AND COLD FLOOR MODEL, WATER FILTRATION SYSTEM 40"H X 13"W X 13"D

3. PROVIDE SPECIMEN PASS-THRU AT TOIL 075 AND 094. SEE ACCESSORY SCHEDULE.

4. PROVIDE HORIZONTAL BABY CHANGING STATION AT TOIL 075. SEE ACCESSORY SCHEDULE. PROVIDE BACKING.

5. MAMMOGRAPHY EQUIPMENT (GANTRY AND CONSOLE) RELOCATED AND INSTALLED BY VENDOR (HOLOGIC). PROVIDE STRUCTURAL ANCHORING PER STRUCTURAL DRAWING. COORDINATE EXACT LOCATION AND RELOCATION TIMING WITH TENANT AND VENDOR. NO RADIATION SHIELD REQUIRED. REFER TO DOCUMENT PROVIDED BY HOLOGIC FOR ELECTRICAL INFORMATION. INSTALL RELOCATED 'PADDLE RACK' ON WALL. (X3) 36"W X 4"D X 7"H. NO BACKING NEEDED. EXACT LOCATION TO BE DETERMINED.
VENDOR CONTACT: ALEX PETRAS ALEX.PETRAS@HOLOGIC.COM

6. X-RAY EQUIPMENT INCLUDING EQUIPMENT IN TECH 079 SUPPLIED AND INSTALLED BY VENDOR (SIEMENS) AT XRAY 078 AND 080. PROVIDE ELECTRICAL CONNECTION TO AND STRUCTURAL SUPPORT AND ANCHORING FOR CEILING MOUNTED TUBE, FLOOR MOUNTED TABLE, WALL STAND AND GENERATOR PER STRUCTURAL DRAWINGS. SEE DOCUMENT PROVIDED BY VENDOR FOR MORE INFORMATION.
VENDOR CONTACT: GREG ERSPAMER, GREGORY.ERSPAMER@SIEMENS-HEALTHINEERS.COM

7. PROVIDE LEAD LINING IN WALLS, DOORS AND FRAMES PER REPORT PROVIDED BY LEGACY'S PHYSICIST. SEE A4.4. PROVIDE LEAD VIEWING GLASS AT TECH 079. SEE INTERIOR ELEVATIONS FOR DIMENSIONS.

8. PROVIDE BACKING FOR TENANT PROVIDED APRON RACK FROM BURLINGTON MEDICAL SUPPLIES, 19" W X 3"H. EXACT LOCATION TO BE DETERMINED.

9. CONTRACTOR TO PROVIDE PATIENT LIFT AT X-RAY 078. PROVIDE STRUCTURAL SUPPORT PER STRUCTURAL DRAWING. OBTAIN DETAILED PRODUCT INFORMATION AND COORDINATE INSTALLATION WITH VENDOR.
PRODUCT: AMICO, GO LIFT FOR 700LB
VENDOR CONTACT: MIKE BROWN, NW CEILING, MBROWNIND@AOL.COM

10. PROVIDE EMERGENCY PULL CORD AT DRESSING ROOM, DRS 081, AND TOILETS AND CORRESPONDING DOME LIGHT WITH CHIME ABOVE DOOR ON HALL SIDE AT TOIL 075, 092, AND 094.
PRODUCT: CORNELL COMMUNICATIONS (OR SIMILAR), EMERGENCY STATION PULL STRING, E114-3, AND CORRIDOR LIGHT LS-201

11. BONE DENSITOMETRY EQUIPMENT (DEXA) SUPPLIED AND INSTALLED BY VENDOR (HOLOGIC). SEE DOCUMENT PROVIDED BY VENDOR FOR MORE INFORMATION. NO RADIATION SHIELD REQUIRED IN WALL.
VENDOR CONTACT: ALEX PETRAS ALEX.PETRAS@HOLOGIC.COM

12. COORDINATE LOW-VOLTAGE AND CONFERENCING EQUIPMENT INSTALLATION WITH LEGACY I.S. AT CONF. 106

13. PROVIDE COPPER WATER LINE TO AND 3/8" SHUT OFF VALVE AT TENANT PROVIDE COFFEE BREWER AT COATS 104.
PRODUCT: BUNN, AXIOM DUAL-LOW VOLTAGE AIRPOT COFFEE BREWER

14. PROVIDE X5 2-TIER 15" DEEP LOCKER AT COATS 104.
PRODUCT: PENCO, VANGUARD, DIE-CAST HANDLE, STANDARD LOUVERS, ZEE BASE, COLOR-CANVAS

15. SEE PLUMBING DRAWINGS FOR INFORMATION ON FLOOR SINK AND DRAINS. EXACT LOCATION TO BE CONFIRMED WITH TENANTS.

16. PROVIDE FLOOR MOUNTED FOOT PEDAL FOR SINK.

17. PROVIDE DECK MOUNTED PLUMBED EYE WASH AT UTIL. 070 AND TESTING 098 .

18. LAB BENCH PROVIDED BY VENDOR. COORDINATE INSTALLATION AND ELECTRICAL CONNECTION.

19. LAB EQUIPMENT RELOCATED AND INSTALLED BY VENDOR. OBTAIN PRODUCT SPECIFICATION FROM ARCHITECT PRIOR TO PRODUCTION OF DESIGN-BUILD DRAWING. COORDINATE ELECTRICAL AND PLUMBING CONNECTIONS.

20. INSTALL TENANT PROVIDED BABY DRAW TABLE. PROVIDE BACKING.

21. PROVIDE PRIVACY CURTAIN AT CEILING SOFFIT AT DRAW 090, 093, AND 095.

22. PROVIDE INTERIOR WINDOWS IN FRAME TO MATCH DOOR FRAME. SEE INTERIOR ELEVATIONS.

23. PROVIDE BLACKOUT ROLLER SHADE AT WINDOW AT TOIL 092. NO SIDE AND SILL CHANNELS NECESSARY.

24. RECESSED STORAGE WITH PLASTIC LAMINATE DOOR AT DRAW 091. USE 2-1/1" STUD AT EAST AND SOUTH WALLS. PROVIDE ROBE HOOK, RH2.

25. PROVIDE EXHAUST FAN IN UTIL 070.

26. PROVIDE PRIVACY CURTAIN AT INTV. 076A. COORDINATE TRACK LOCATION WITH CEILING MOUNTED DEVICES. TOP 18" TO BE WHITE MESH AND FABRIC TO COME DOWN 12" ABOVE FLOOR FINISH.

27.

SHEET NOTES - FLOOR PLAN, AREA A P22148

1/4" = 1'-0"

1. CONTRACTOR TO VERIFY EXISTING CONDITIONS

2. FOR TYPICAL FLOOR TRANSITION DETAILS THAT ARE NOT KEYED ON PLANS REFER TO SHEET A8.04.

3. SEE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS, FOR ADDITIONAL OPENINGS IN WALLS.

4. MEDICAL EQUIPMENT AND FURNITURE SHOWN SCREENED FOR REFERENCE

5. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.

6. EXISTING EXTERIOR WINDOW COVERINGS REMAIN. REMOVE PRIOR TO CONSTRUCTION, CLEAN, AND REINSTALL. MODIFY EXISTING WINDOW COVERINGS OR PROVIDE NEW BUILDING STANDARD EXTERIOR WINDOW COVERINGS AT NEW ROOM CONFIGURATIONS.

7. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

GENERAL NOTES - PLAN S25624

12" = 1'-0"

1. SEE SHEET A0.002 FOR SYMBOL LEGEND AND ABBREVIATIONS.
2. SEE SHEET A0.012 FOR LOCATIONS OF FIRE RATED ASSEMBLIES.
3. SEE SHEET A8.103 FOR OPENING SCHEDULE.
4. SEE SHEET A8.001 FOR PARTITION SCHEDULE.
5. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.
6. SEE SHEET A8.101 FOR DIMENSIONS OF DOOR TO WALL, UNLESS NOTED OTHERWISE.
7. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
8. ALL INTERIOR FURRING ON EXTERIOR WALLS AND RECTANGULAR COLUMN SURROUNDS ARE C/A/2 UNO.
9. SEE STRUCTURAL FOR CEILING HUNG TOILET PARTITION SUPPORT

GENERAL NOTES, FLOOR PLAN, OVERALL (PH 2) S24925

12" = 1'-0"

1. TENANT INTERIOR PARTITIONS ARE TO BE TYPE G/0/3 WITH 20 GAUGE METAL STUDS @ 16" O.C. UNLESS NOTED OTHERWISE. REFER TO SHEET A8.01.
2. DIMENSIONS ARE TO FACE OF FINISH OF PARTITION UNLESS NOTED OTHERWISE.
3. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.
4. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.
5. SEE ELEVATIONS FOR EXTENT OF MULTIPLE FINISHES.
6. AT EXISTING WOOD COLUMNS AND BEAMS, PROVIDE INFILL AT EXISTING NOTCHES AND PAINT AS SCHEDULED.
7. WHERE NEW PARTITIONS ABUT EXISTING STRUCTURAL COLUMNS OR BEAMS, PROVIDE AND INSTALL CONTINUOUS ACOUSTIC SEALANT, U.N.O.
8. PATCH AND REPAIR ALL EXISTING SUBSTRATES AND FINISHES DAMAGED OR DESTROYED DURING DEMOLITION.
9. REPLACE EXISTING HARDWARE TO MEET ADA REQUIREMENTS. ALL NEW HARDWARE TO MEET ADA REQUIREMENTS, TYPICAL.
10. REMOVE ALL UNUSED DUCTWORK, PIPING, LIGHTING, CABLE TRAY, AND CONDUIT, EQUIPMENT, HARDWARE, ACCESSORIES AND CONTROLS FROM WALLS. USEABLE EQUIPMENT, HARDWARE, ACCESSORIES AND CONTROLS TO REMAIN SHALL BE ALIGNED IF ADJACENT TO ADA REQUIRED HEIGHTS.
11. CONTRACTOR TO COORDINATE ALL INSTALLATION REQUIREMENTS OF CONTRACTOR-INSTALLED APPLIANCES.
12. AT ALL OUTLET BOXES IN OFFICES, PHONE ROOMS, CONFERENCE ROOMS AND WELLNESS ROOM, PROVIDE ELECTRICAL OUTLET BOX ACOUSTIC PADS, REFER TO SPECIFICATIONS. DO NOT LOCATE OUTLET BOXES BACK TO BACK. REFER TO SHEET A8.02 FOR DETAILS.

GENERAL NOTES - FLOOR PLAN P23708

12" = 1'-0"

1. UNLESS NOTED OTHERWISE
   A. DIMENSIONS FOR COLUMNS ARE TO CENTER OF COLUMNS
   B. INTERIOR WALLS ARE DIMENSIONED TO DOMINANT FACE OF THE WALL
   C. DIMENSIONS FOR CABINETS AND CASEWORK ARE TO FACE OF CABINET
2. WHERE A DIMENSION IS NOT SHOWN ON A LARGE SCALE PLAN, REFER TO ENLARGED PLANS OR DETAILS.
3. WHERE DOORS ARE LOCATED ADJACENT TO PERPENDICULAR WALLS, THE DISTANCE FROM FACE OF WALL TO DOOR OPENING IS 4", U.N.O.

GENERAL NOTES - FLOOR PLAN DIMENSION NOTES N24448

12" = 1'-0"

6. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

7. FINISHED FLOOR SHALL MEAN FROM THE TOP OF THE LEVELED FLOOR SLAB, TAKEN FROM A DATUM AT THE EXISTING ELEVATOR DOOR THRESHOLD

8. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS. PROVIDE PLYWOOD OR SHEETMETAL BLOCKING TO ALL WALL HUNG AV RECESSED MOUNTS AND TVS.

9. NOT IN USE

10. ALL HOLLOW METAL DOORS SHALL BE MADE OF THE TYPES AND SIZES AS SHOWN ON THE ARCHITECT'S DRAWINGS, NOTES, AND SCHEDULES. DOORS SHALL BE 16 GA CRS, FULLY WELDED SEAMLESS CONSTRUCTION WITH NO VISIBLE SEAMS OR JOINTS ON THEIR FACES OR VERTICAL EDGES.

11. NOT IN USE

12. PATCH ANY DAMAGES (INCURRED DURING DEMOLITION OR CONSTRUCTION) AT ALL EXISTING TO REMAIN LOCATIONS INCLUDING BUT NOT LIMITED TO: CORE WALLS, COLUMNS, PERIMETER AREAS, WINDOW MULLIONS AND SEALANT, ETC.

13. CONTRACTOR TO PROVIDE PROPER PROTECTION OF ALL EXISTING TO REMAIN ITEMS DURING ALL PHASES OF CONSTRUCTION AND DEMOLITION.

14. INSTALL FIRE SAFETY DEVICES AS PER ENGINEERING DRAWINGS.

15. NOT IN USE

17. PROVIDE FLOOR LEVELING (FLASH PATCHING) AS REQUIRED TO INSTALL WALL SYSTEM PARTITION. LEVELING TO EXTEND 3'-0" ON EITHER SIDE OF (PERPENDICULAR TO) CENTERLINE OF TO A TOLERANCE OF 1/8" VARIATION PER 10'-0" PARALLEL TO CENTER LINE OF WALL SYSTEM PARTITION.

18. RE-APPLY FIRE-PROOFING (MONOKOTE AND SPRAY APPLIED SEALER, OR CONCRETE) WHERE DAMAGED OR MISSING. RE-APPLY FIRE PROOFING TO ALL EXPOSED STEEL (AND ANY NEW WELDED CONNECTIONS) IN SIMILAR METHODS AS ADJACENT STRUCTURE. PROVIDE FIRE PROOF SEALANT AT ALL HORIZONTAL AND VERTICAL PENETRATIONS THROUGH ALL NEW AND/OR EXISTING FIRE RATED PARTITIONS AND FLOOR SLABS. PATCH AND REPAIR ALL FIRE RATED ASSEMBLY FOR ALL COLUMNS AND BEAMS PER NEW YORK CODE.

19. PROVIDE WATER RESISTANT DRYWALL AT ALL WET LOCATIONS.

20. ALL EXISTING BLOCK AND CONCRETE WALLS WITH COMPROMISED STRUCTURE AND EXISTING PENETRATIONS TO BE REPAIRED TO THEIR ORIGINAL STATE AND MUST MAINTAIN THEIR EXISTING FIRE RATINGS PER CODE.

21. CONTRACTOR TO PROVIDE ADEQUATE BRACING AT ALL LOCATIONS WHERE NEW PARTITIONS INTERSECT WITH DUCTWORK 2'-8" WIDE OR LARGER.

22. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

23. PROPER ACCESS TO ALL EXISTING PERIMETER FAN COIL UNITS, SUPPLY AND RETURN WATER VALVES AT PERIMETER COLUMNS IS TO BE MAINTAINED AND PROVIDED. NOTIFY ARCHITECT OF ANY CONFLICTS IN FIELD.

24. NEWLY CONSTRUCTED WALL PARTITIONS ARE NOT TO BLOCK ANY EXISTING PERIMETER FAN COIL UNITS. NOTIFY ARCHITECT IF A CONFLICT ARISES IN FIELD.

25. REPAIR ANY DAMAGES TO EXISTING STEEL AND CEILING DECK FIRE PROOFING AS PER NEW YORK CITY CODE.

26. REPAIR ANY DAMAGES TO EXISTING CONSTRUCTION FIRE PROOFING AS PER NEW YORK CITY CODE.

27. COMPLY WITH NEW YORK CITY BUILDING CODES.

28. CENTER OF DEMISING WALLS BETWEEN OFFICES ALONG PERIMETER TO ALIGN WITH CENTER OF EXISTING EXTERIOR MULLIONS.

29. GC TO COORDINATE DEDICATED OUTLETS LOCATION WITH EQUIPMENT SPECIFICATIONS AND INSTALLTION INSTRUCTIONS

GENERAL NOTES - FLOOR PLAN N26198

12" = 1'-0"

1. UNLESS NOTED OTHERWISE, TENANT INTERIOR PARTITIONS ARE TO BE TYPE **A**

2. UNLESS NOTED OTHERWISE, DEMISING PARTITIONS ARE TO BE TYPE **0**

3. **PARTITIONS ARE CENTERED ON BUILDING PLANNING MODULE UNLESS DIMENSIONED OR NOTED.**

4. DIMENSIONS ARE TO FINISH FACE OF GYPSUM BOARD PARTITION UNLESS NOTED OTHERWISE.

5. PROVIDE REINFORCEMENT IN PARTITIONS FOR ANCHORAGE OF CASEWORK, MILLWORK AND OTHER WALL-SUPPORTED ITEMS.

6. PROVIDE LEVEL 4 FINISH AT ALL NEW GYPSUM BOARD PARTITIONS UNLESS NOTED OTHERWISE.

7. LEAD-LINED GYPSUM WALL BOARD TO HAVE RADIATION PROTECTION EQUAL TO OR GREATER THAN REQUIREMENTS IN PHYSICISTS REPORT.
REFER TO SHIELDING REPORT & CALCULATIONS, BILLIE J. HARVEY, MS, CHP.

GENERAL NOTES - FLOOR PLAN S26210

12" = 1'-0"